



WIRE DESIGN SYSTEM

2023

WWW.BLUEWAVE.DK



BLUE WAVE®
WIRE DESIGN SYSTEM

Innovative stainless steel solutions since 1932

Blue Wave has manufactured innovative stainless steel wire solutions since 1932. Our main markets are the marine, architecture and safety sectors, but the Blue Wave portfolio is broad and our components can be found in various projects around the world.

Based in Denmark, we pride ourselves of our sleek Scandinavian design and high standard. As a family-owned business, we have gained a close relationship to our customers through generations.

With an innovative mindset and investment in high tech machinery, we are constantly in development which enables us to follow market demand and meet our clients' needs. The extensive product range focuses on good design, low weight and optimum strength.

Blue Wave is ISO 9001 certified.

Information and contact

Please refer to your local Blue Wave distributor or the head office directly if you have any questions or need further documentation.

Note that Blue Wave reserves the right to make changes to the catalogue with no notification. Printing errors may occur.

Blue Wave A/S

H.C. Oerstedsvej 2
DK 6100 Haderslev
Denmark

Email:

bluewave@bluwave.dk

Website:

www.bluwave.dk

Phone:

+ 45 73 22 14 14

CONTENTS

4

Facts and information

16

Rigging screws

22

Wire terminals

28

Swageless terminals

32

Small rigging screws and terminals

39

Bodies

40

Threaded fittings

47

Spares for riggings screws

50

Accessories

- 50 Toggles
- 51 Bolts
- 53 Eye straps
- 53 Cover disc
- 54 Shackles
- 55 Thimbles
- 56 Angle hinges
- 57 Balls
- 58 Clips
- 59 Balustrade wire relief
- 60 Stoppers

62

Systems

- 62 Glass roof system
- 64 Shade system - membrane plates
- 66 Wire railing - ball connection
- 68 Green Line system - trellis posts
- 70 Tie bar system
- 71 Balustrade kit - vertical wire
- 72 Rope Line

73

Stainless steel wire rope

74

Tools

FACTS AND INFORMATION

Working with wire fittings

When planning a wire construction the ultimate break load, as well as the work load, must be calculated as it will determine the minimum wire size and maybe the wire construction needed.


Blue Wave's fittings, unless otherwise stated, are constructed after termination to meet 90% of the break load on wire ropes that are standard on the market. To reach full break load jaw terminals must carry/be filled to 80 % of jaw width.

Please note: In order to guarantee safety in a wire construction you should calculate a safety factor of 2-3 on static constructions and a minimum of 5 on dynamic constructions. As a general rule working loads should never exceed 20% of the break loads stated in this catalogue.

For further details ask your Blue Wave wire design system distributor or contact Blue Wave A/S directly.

SWAGE DIMENSIONS CHART

Wire mm	Thread Metr.	Inside Diameter (+/- 0,2)	Outside Diameter (+/- 0,10)	Depth (+/- 1,5)	After Swaging mm
2,0	M5	2,2	5,5	32	4,7 - 4,82
2,5	M5	2,8	5,5	32	4,7 - 4,82
3,0	M6	3,5	6,35	38	5,44 - 5,56
4,0	M8	4,4	7,5	45	6,23 - 6,35
5,0	M10	5,3	9,0	51	7,83 - 7,95
6,0	M12	6,5	12,58	64	10,95 - 11,12
7,0	M14	7,5	14,2	70	12,5 - 12,7
8,0	M16	8,4	16,0	83	14,07 - 14,3
10,0	M20	10,5	17,8	89	15,7 - 15,9
12,0	M20	12,5	20,0	105	17,6 - 17,8
14,0	M22	14,8	25,0	140	22,0 - 22,23
16,0	M24	17,0	28,0	160	25,15 - 25,40
19,0	M27	20,0	34,5	200	31,44 - 31,75
22,0	M30	23,5	40,5	230	36,2 - 36,50
26,0	M36	27,5	46,0	280	40,97 - 41,28
28,0	M48	30,0	50,0	300	44,00 - 44,50
30,0	M52	31,5	58,0	315	51,00 - 51,50
32,0	M56	33,5	58,0	340	51,00 - 51,50
36,0	M60	38,0	65,0	380	57,00 - 57,80

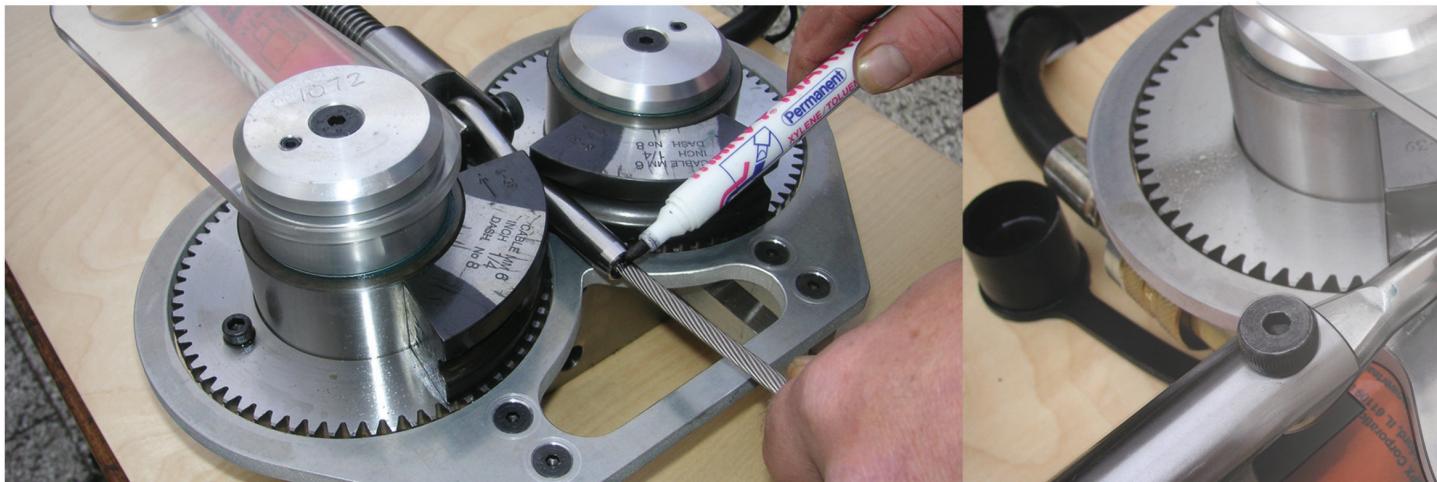

SWAGING Ø12 MM TERMINALS

There are 2 set of dies for 12 mm terminals: 12E and 12. 12E dies are used for swage fittings with an OD of ø20 mm before swaging. These dies are commonly used with 7 strand cables, such as 7x7 and 7x19, but can also be used with 1x19 cables.

Please note: Due to the strength of compacted cables, do not use 12E dies and end fittings.

The 12 dies are used for swage fittings with an OD of ø21,4mm before swaging.

For compacted and Dyform cables, Blue Wave always recommends using the 12 dies and swage fittings with OD of ø21,4 mm before swaging.

CORRECT ATTACHMENT

Ensure that the wire is clean and has an evenly cut end.

Always use the correct size standard dies recommended by the supplier. Correct wire attachment/termination can only be achieved by firmly swaging the material of the terminal into the strands of the wire.




Most Blue Wave terminals are marked with wire size and a mark indicating the hole depth and where to start for correct swaging.

Blue Wave wire terminals correspond to the standard sizes and stainless materials used in the market. The terminals are produced so that a swage machine (e.g. from Wireteknik) will produce a swage within given tolerances in 1 (one) pass in the machine. When extremely compact strand ropes are used, 2 (two) passes in the same track could be needed to reach tolerances.

Additional passes should NOT be made.

Where wire hole depth is not marked e.g. on the small terminals, the wire hole depth must be measured before swaging, not only to find the point to start the swaging, but also to get the right length of the final wire including the fittings.

Caution: By swaging the terminals onto the wire, the shaft will get a little longer.

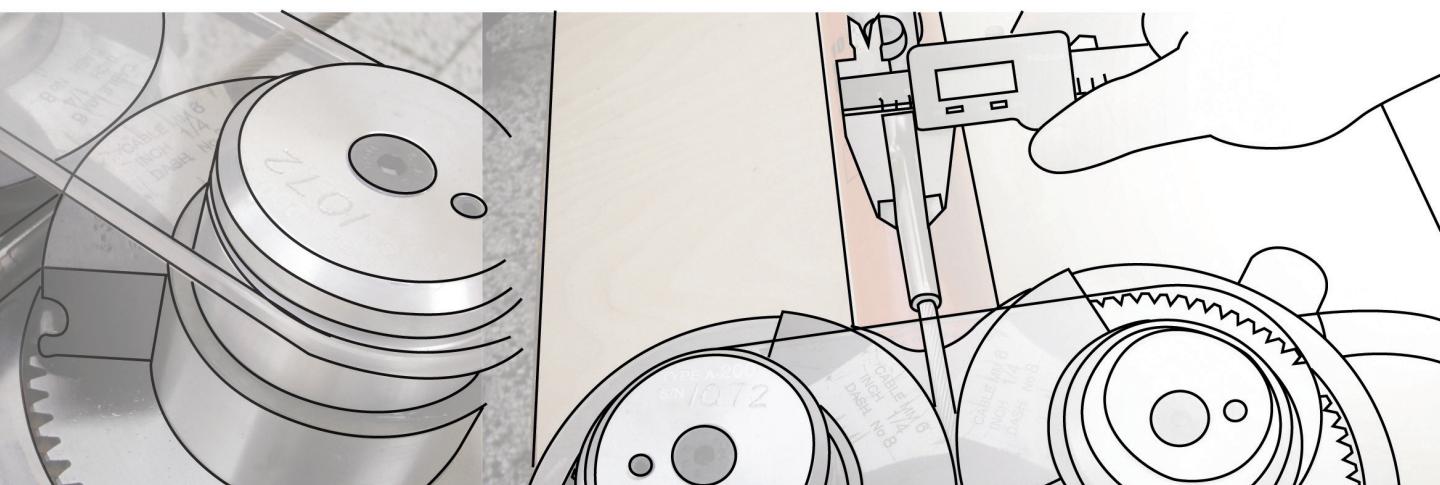

ATTACHING TERMINALS

Throughout the WDS catalogue you will find indications of the correct attachment.



For full break load Blue Wave recommends pressing or swaging/rolling the terminals onto the wire ropes. Recommended machines for this purpose are e.g. presses from TALURIT® and roller swaging machines from WIRETEKNIK. The terminals are also suitable for rotary hammer pressing.

SWAGELESS TERMINALS

If the exact length of the final wire is unknown a good solution is only to swage one end and screw a swageless terminal onto the wire for final attachment on site at the other end (see instructions on page 14+15).

SMALL TERMINALS

Alternatively the WDS range of small fittings can be crimped onto the wires by using a hand tool, however, due to reduced amount of material in the small fittings, only a 50% break load of the wire can be obtained by this method.

ELONGATION AND STRETCH IN WIRE ROPE

Two different kinds of elongation can be distinguished. Constructional elongation and material elongation which is specific to the material used in the manufacturing process.

Structural elongation

After the manufacturing process of the ropes and strands, small gaps remain between each wire within the strand and between each strand in the rope. When the rope is tensioned, the wires and the strand move closer to each other, and reach their optimum position. A result of the process is that the rope permanently elongates to a certain extent.

This constructional elongation is not the same in every rope construction. It depends on lay, lay length, rope construction and other factors.

Material elongation/Elastic

This elongation concerns the material that the single wires are made of. It occurs when the wire is tensioned. The material elongation is proportional to the applied load. Under normal circumstances the rope will almost regain its original length. If forces however exceeds 50% of the break load of the material, then plastic deformation occurs and the lifetime will be affected immediately. Therefore proofload tests at max 2/5 of the break load.

The material elongation can be calculated with the following formula:


$$ES \text{ (elastic stretch)} = \frac{\text{Applied load (kN)} \times \text{wire length in mm}}{\text{E-Modulus (kN/mm}^2\text{)} \times \text{Cross sectional area (diameter}^2 \times \pi/4)}$$

WDS BREAK LOADS

Wire mm	Thread Metr.	Break Load Kg
2,0	M5	800
2,5	M5	800
3,0	M6	1.200
4,0	M8	1.700
5,0	M10	2.500
6,0	M12	5.100
7,0	M14	6.800
8,0	M16	8.700
10,0	M20	9.700
12,0	M20	11.400
14,0	M22	14.700
16,0	M24	18.000
19,0	M27	23.000
22,0	M30	28.000
26,0	M36	41.000
28,0	M48	70.000
30,0	M52	80.000
32,0	M56	90.000
36,0	M60	115.000

TENSIONING OF WIRE WITH TERMINALS


As well as serving as an attachment to a given construction, threaded terminals, once on or the wire, can serve as a tensioner. Where tension cannot be applied to the thread via a nut at the end, the wire can be tensioned by use of e.g. right handed and left handed thread terminals at each end of the wire, by turning the whole wire it will be tensioned.

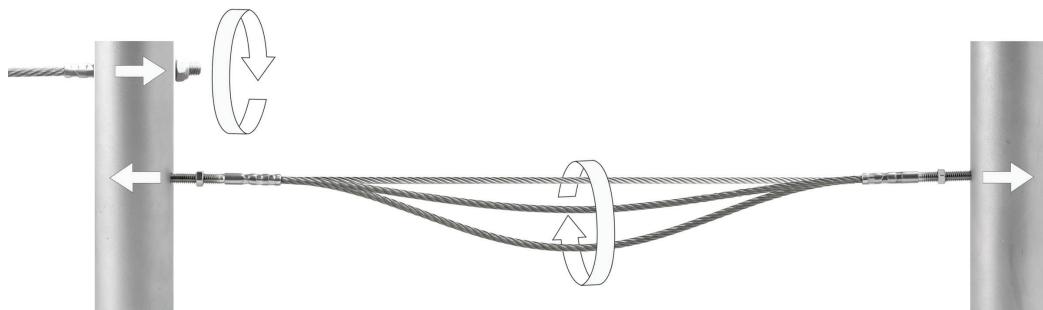

RECOMMENDED MAX. LENGTH


BLUE WAVE FITTINGS

WIRE Ø	G	L + L	RML - 7 x 19	RML - 7 x 7	RML - 1 x 19
3	M6	62	10M	12M	14M
4	M8	76	12M	13M	15M
5	M10	84	14M	14M	16M
6	M12	106	16M	16M	19M
8	M16	132	16M	19M	20M
10	M20	160	16M	20M	22M

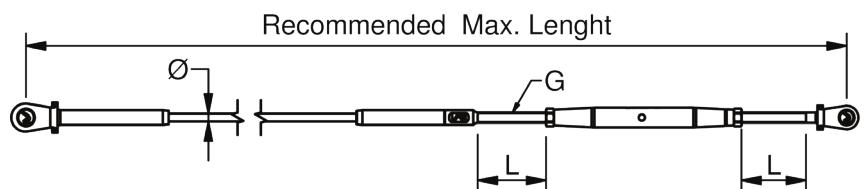

BLUE WAVE SMALL FITTINGS

WIRE Ø	G	L + L	RML - 7 x 19	RML - 7 x 7	RML - 1 x 19
3	M5	36	6m	10m	12m
4	M6	44	8m	10m	14m
5	M6	44	10m	12m	14m
6	M8	46	10m	12m	14m

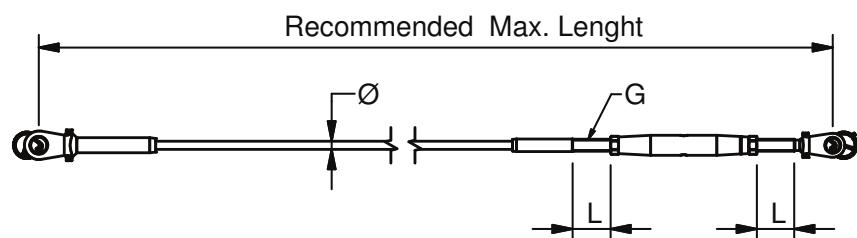


WIRE RAILINGS


The flexibility of the wire design system offers a solution to almost every imaginable wire railing possible.

Below a selection of wire attachments and tension options have been set up for inspiration. Find details inside the catalogue and contact your local wire design dealer for further advice.



STRAIGHT ATTACHMENT

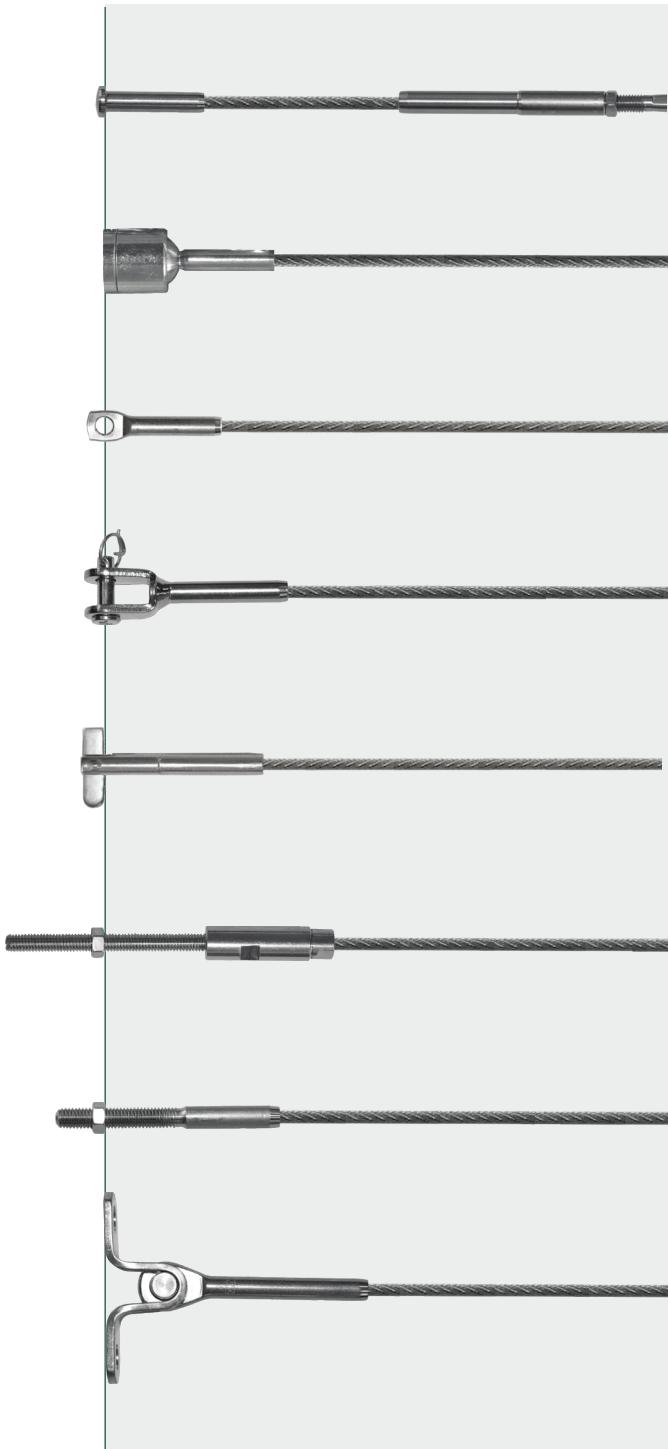

DIAGONAL ATTACHMENT

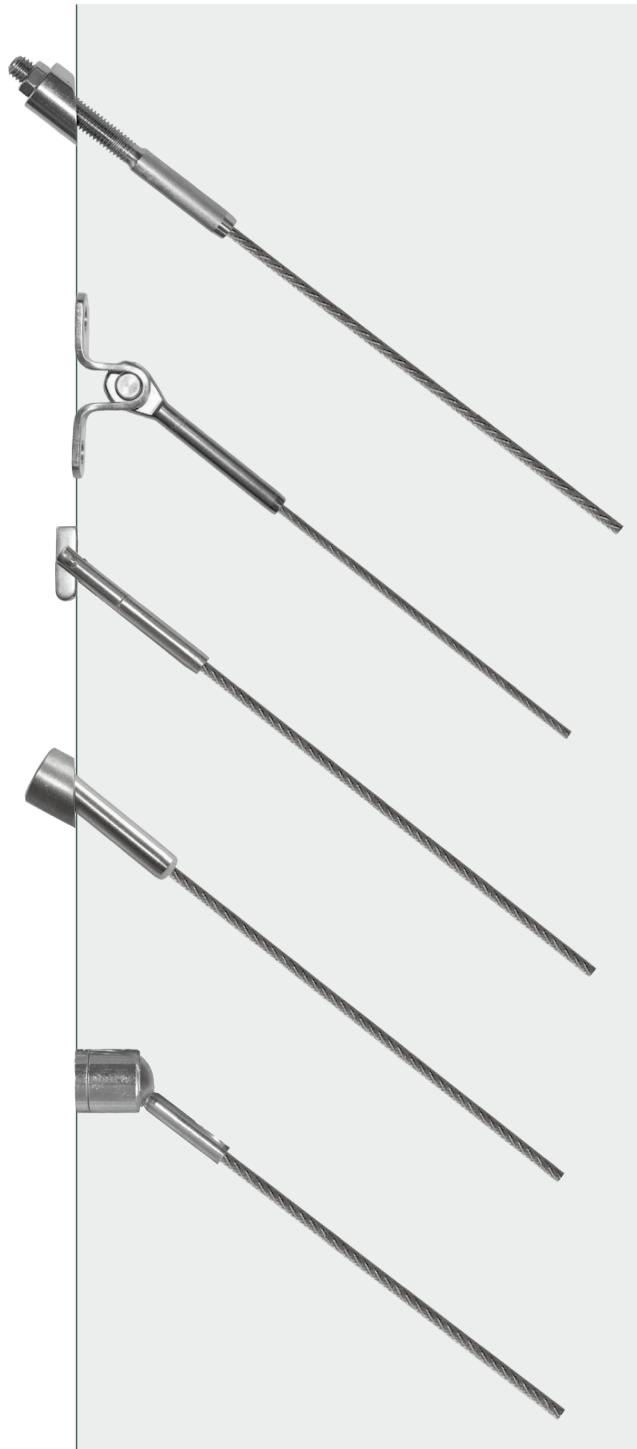

TENSION AND ATTACHMENT

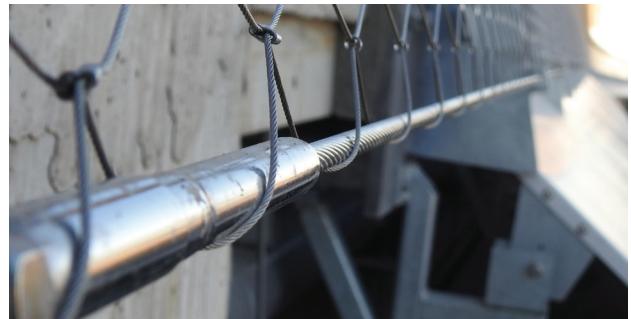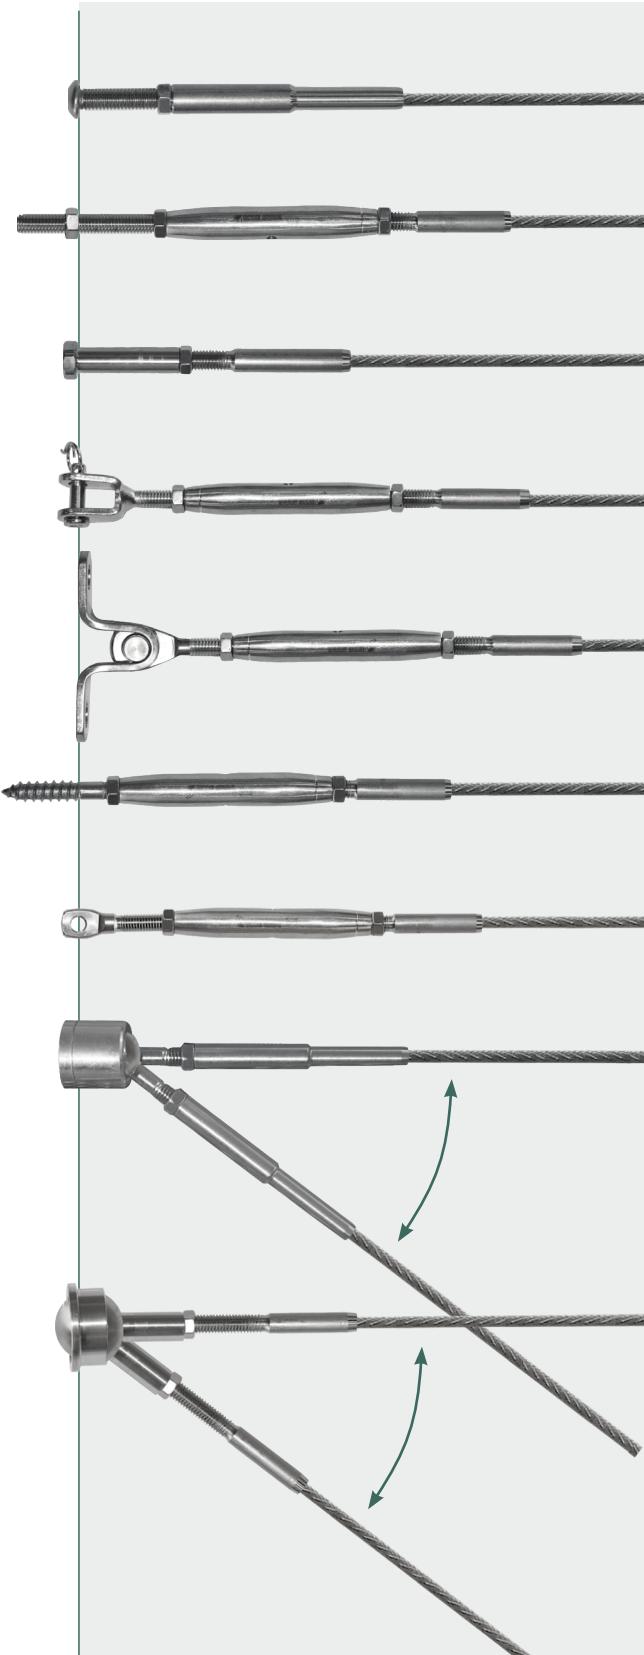

TENSION AND CONNECT



WIRE RELIEF




STAINLESS STEEL GRADES AND CERTIFICATES

Below is a table of the most frequently used types of stainless steel grades and their chemical composition.

EN	AISI	C %	Cr %	Ni %	Mo %	N %	Si <%	Mn <%	S <%	P <%	PREN
1.4301	304	≤ 0,07	17,5 - 19,5	8,00 - 10,5	-	-	1,0	2,0	0,015	0,045	17,5
1.4401	316	≤ 0,07	16,5 - 18,5	10,0 - 13,0	2,00 - 2,50	-	1,0	2,0	0,015	0,045	23,1
1.4404	316 L	≤ 0,03	16,5 - 18,5	10,0 - 13,0	2,00 - 2,50	-	1,0	2,0	0,015	0,045	23,1
1.4571	316 Ti	≤ 0,08	16,5 - 18,5	10,5 - 13,5	2,00 - 2,50	-	1,0	2,0	0,015	0,045	23,1
1.4462	318 LN	≤ 0,03	21,0 - 23,0	4,50 - 6,50	2,50 - 3,50	0,1 - 0,22	1,0	2,0	0,015	0,035	30,9

Blue Wave uses a X-ray device for the control of raw materials.

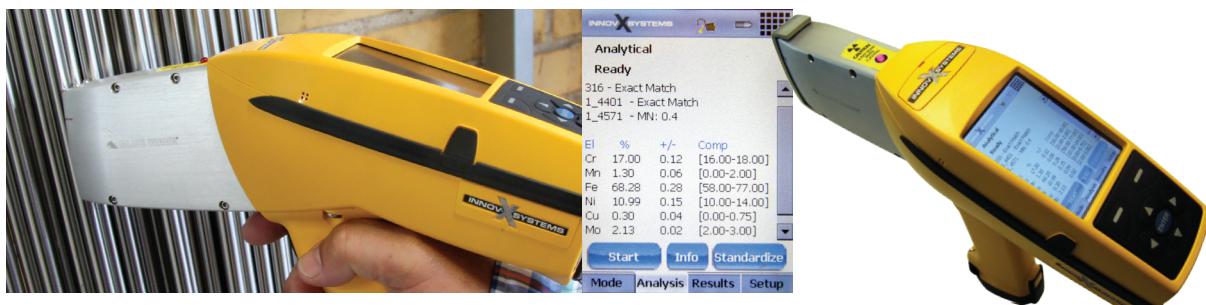

ISO CERTIFIED PRODUCTION

We are ISO 9001:2015 certified and do on request issue the following certificates for our products.




CERTIFICATES

CERTIFICATES	DESCRIPTION
BWCC	Certificate of conformance
BW21	2.1 Certificate; declaration of compliance with the order
BW22	2.2 Test report, non specific
BW31	3.1 Inspection Certificate, specific w. destructive test

HOW TO KEEP THE STAINLESS STEEL STAINLESS



Claus Qvist Jessen
MSc, chem. Eng. PhD
Damstahl a/s

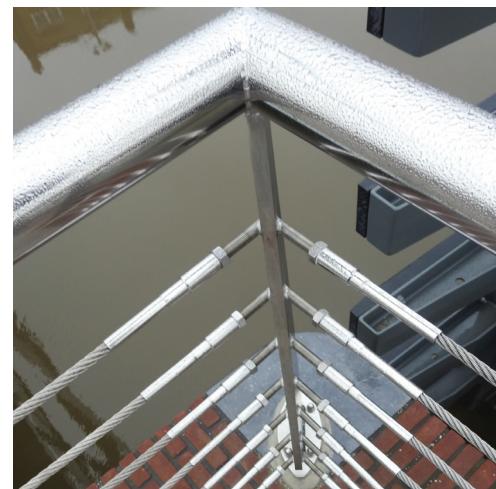


Stainless steel is a wonderful material, and treated properly, it will stay bright and stainless forever. Sadly, natural saltwater is one of the most aggressive and corrosive media towards stainless steel, and even the "acid resistant" 316L class requires a bit of maintenance in order to stay stainless.

In case of 316L above water, the main issue is time. Saltwater is very aggressive towards virtually any alloy, and the key issue is to keep the contact time as short as possible. In wet, temperate conditions, such as Scandinavia, the Canadian West Coast or the South Island of New Zealand, the all-too-common rain takes care of this, however, in warmer and drier conditions, such as Southern Europe and The Middle East, things are much different. Here, all saltwater sprayed onto the steel will tend to stick to the steel forever, with little chance of rain from above. Similar conditions are observed in dry season in the Caribbean, the tropical Pacific, or in South-East Asia. In the wet season, these places receive large amounts of rain, rendering any freshwater cleaning superfluous.

Very likely, the saltwater will cause superficial pitting corrosion, and although such attacks may not cause operational failure, it certainly looks unattractive and should be avoided. The best and cheapest way to avoid pitting corrosion is to keep the contact time low. Cleaning off the saltwater as quickly as possible keeps the contact time short, and the risk of corrosion correspondingly low. **The more frequent the freshwater rinse, the better**, and, presumably, a thorough rinse every fortnight should do the trick.

Be particularly aware that fittings below a braided steel cable are particularly prone to collecting saltwater, and so is the braided cable itself. Due to gravity, the upper fittings (pointing downwards) are less exposed to saltwater and may be rinsed less frequently.

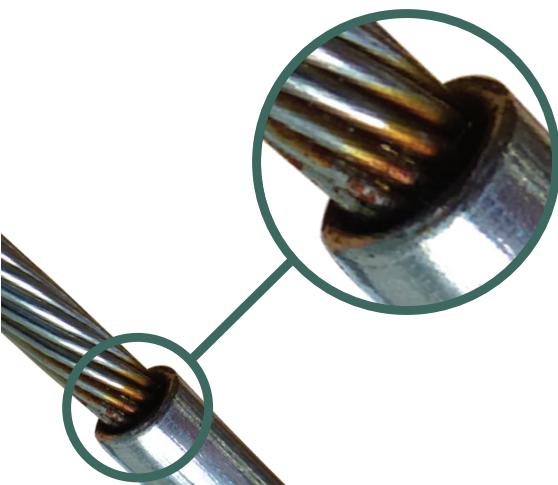

BLUE WAVE HIGH QUALITY LUBRICANT

Synthetic oil based Lubricant with PTFE


The Blue Wave lubricant contains PTFE micro powder dispersed in synthetic base oil with anti-oxidation additives. This highly effective lubricant with long life properties is used for metal to metal applications. It is water-repellent, does not soil and resists temperatures between - 50°C and +200°C. Furthermore, it is non-ageing and has extremely low friction.

The lubricant is supplied in tubes of either 5, 30 or 50 gr.

Whenever stainless steel threaded parts are screwed together it is always strongly recommended to lubricate the threads first as this prevents the threads from jamming.

BWLUB

ART. NO.	NET. WEIGHT	LB/100
BWLUB1	50g	5
BWLUB2	30g	3
BWLUB3	5g	0,5

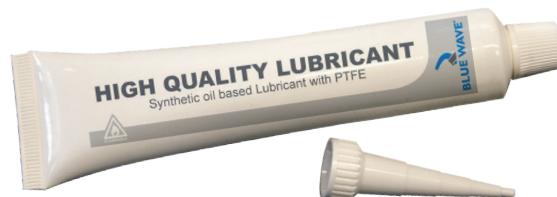

SCTKIT

ART. NO.	NET. WEIGHT	KG/100
SCTKIT	6g	6

SCTKIT contains lubricant and thread seal for one time use e.g. for swageless cone terminal assembly



Blue Wave products can be used in temperatures ranging from -40°C to +100°C and briefly up to 200°C

SWAGELESS JAW TERMINALS



Jaw housing




Jaw housing



Pressure ring (brass)



Head

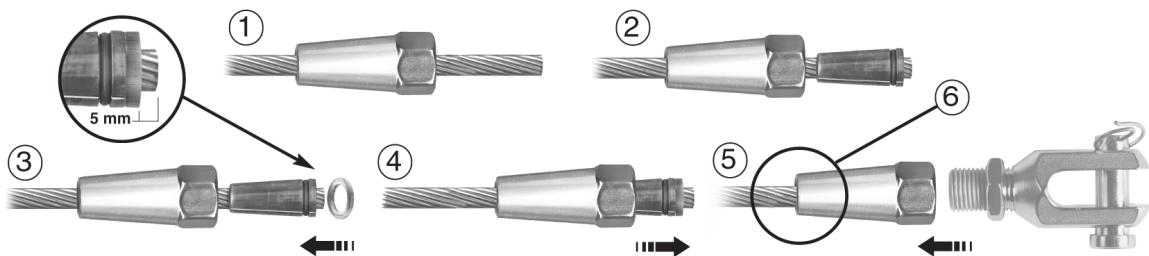

ASSEMBLY INSTRUCTIONS

- 1:** First slide the jaw housing in place on the cable.
- 2:** Then slide the jaws onto the cable, ensuring there is some space between the jaw section.
- 3:** Place the brass pressure ring on the end of the cable. Make sure that the distance from the pressure ring to the end of the cable is 5 mm.
- 4:** Slide the jaw housing over the jaws.
- 5:** The terminal can now be assembled. Screw the head firmly on the jaw housing with a spanner. Then tighten the lock nut firmly with a spanner.

6: The terminal must be sealed with a non-acidic sealing compound when assembling, Sikaflex-221, for example.

Disassemble the terminal and fill the jaw housing and the cavity with sealing compound, then assemble the terminal. Repeat this until the sealing compound emerges from the hole through which the cable is inserted. Clean the terminal. Do not reuse the jaws. Make sure that the dimensions of the terminal and cable match.



Maintenance

Check the terminal regularly for damage in connection with longer exposure to concentrated saline solutions or polluted surroundings. Check the seal, if it is broken remove all sealing compound. Then rinse the terminal with fresh water and treat it with WD40. Reseal the terminal with non-acidic sealing compound.

Note

After the first dynamic load the terminal MUST be tightened again. The terminal was developed for use with the following types of cable: 1x19, 7x19, 7x7. The terminal can also be used with Dyform (MBL 1570 N/mm²). When assembling Swageless Terminals the breaking strength of the cable used will be reduced by 0-15%. Refer to the table for the breaking strength of the terminal.

The user is responsible for choosing the proper cable diameter and for correct assembly





- Innovative product
- More opportunities to benefit from UHMWPE and UHMW ropes
- Unique and slim design
- Easy and viable to use and assemble
- AISI 316L stainless steel and hard anodized aluminium materials
- Easy to fit to existing rigging screws and deck fittings
- Backed by a full range of high quality rigging hardware



"KEEP IT SIMPLE"



House



Bone



Eye



Slide the housing over the rope



Splice around the bone - following your rope suppliers general splice guidelines



Pull spliced bone back in housing



Screw the parts together - threads can be locked with Loctite



The swageless cone terminal is designed for use on 1x19 wire construction as well as compacted and Dyform wires. The user is responsible for proper use and installation of the components. Blue Wave does not take responsibility for damaged threads due to overtightening or lack of Loctite. Blue Wave does not recommend to seal the terminal, but advises to rinse the terminal regularly with fresh water and to treat it with WD40.



Cone-house

Cone

Eye



- 1 
- 2 
- 3 
- 4 
- 5 
- 6 
- 7 

Apply Loctite 262 on threads and lightly screw the two parts together. Unscrew and check both threads are filled with Loctite.

Slide the cone housing over the wire.

Open the outer strands one by one. A screwdriver is helpful for this job.

Place the cone over the center core of the wire, rotating the cone while pushing.

$1 \frac{1}{2} \times$ wire dia.

Twist the outer strands back over the cone. Make sure that all strands are evenly distributed over the cone. The end of the wire must be $1 \frac{1}{2} \times$ the wire diameter over the top of the cone. Check this distance with callipers.

Fill the wire former hole with Blue Wave lubricant. The terminal is now ready to be assembled.

Using appropriate tools, screw the two parts together tightly. To ensure total security apply one last half turn. However, do not overtighten threads with excessive force.

NOTE: the former (top part) must be screwed all the way into the housing - max. 2 - 3 threads visible!

As a precaution take the terminal apart and visually check that the strands lie evenly around the cone and fit into the wire former (top part). Finally re-assemble as above and allow the Loctite to dry.

RIGGING SCREWS

The price friendly and durable stainless steel turnbuckles from Blue Wave have been favourites among riggers and yachtmen for more than 50 years. The rigging screws feature laser engraved thread size and side marking of the left thread.

See small fittings section on page 32 for small rigging screws

Turnbuckles with terminals show wire size and outside wire hole depth marking for easy handling. From M20 and upwards the bodies are available with chrome bronze inserts. Most rigging screws are also available with open body and UNF thread on request.

RIGGING SCREWS FORK/FORK

Polished stainless steel - AISI 316




ART. NO.	G	PIN	A	B	L1	L2	BL/KG	KG/100	PACK
120005	M5	5	7,5	12	188	126	800	5,1	10
120006	M6	5	7,5	12	210	142	1000	9	10
120006X	M6	6	9,5	13	213	145	1250	14	10
120008	M8	6	9,5	13	251	170	1600	14	10
120008X	M8	8	11	15	258	178	2200	15	10
120010	M10	8	11	15	272	197	3200	24	10
120010X	M10	9,5	12	19	286	204	3500	26	10
120012	M12	12	14	25	359	251	5100	52,5	5
120012X	M12	14	18	32	375	269	5100	72,2	5
120014	M14	12	14	25	400	280	6900	63,5	5
120014X	M14	14	18	32	413	295	6900	84,5	5
120016	M16	14	18	32	480	320	9400	100	5
120016L	M16	14	22	30	472	312	9400	100	5
120016X	M16	16	18	33	479	319	9400	100	5
120020	M20	19	24	48	550	390	14000	197	BULK
120020L	M20	19	30	47	559	389	14000	197	BULK
120022	M22	22	30	57	653	472	18000	448	BULK
120024	M24	25,4	30	62	796	539	21000	638	BULK
120027	M27	28	32	68	825	590	23000	501	BULK
120030	M30	32	35	76	907	647	28000	1060	BULK
120036	M36	35	40	86	990	715	41000	1657	BULK

Note: All break loads are determined by clevis pin and thread

! M20> M36 available with threaded bronze inserts in a stainless steel body

The larger size rigging screws from M20 and up are designed with a rounded fork head and are available with bronze threaded inserts for smooth adjustment.

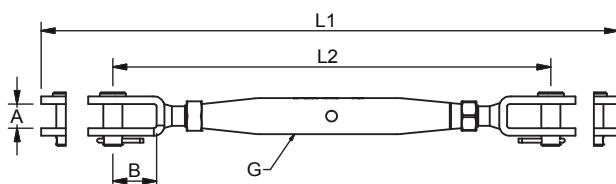




RIGGING SCREWS MACHINED FORK/FORK

Polished stainless steel - AISI 316

ART. NO.	G	PIN	A	B	L1	L2	BL/KG	KG/100	PACK
740020	M20	19	20	45	619	453	12000	330	BULK
740022	M22	22	22	49	637	456	15000	892	BULK
740024	M24	25	25	52	763	530	18000	1193	BULK
740027	M27	28	30	55	813	578	23000	1803	BULK
740030	M30	32	35	67	918	656	28000	2614	BULK
740036	M36	35	35	67	970	696	41000	3390	BULK
M740048	M48	46	43	106	1268	924	70000	4936	BULK
M740052	M52	53	46	122	1412	1026	80000	5388	BULK
M740056	M56	53	46	122	1476	1066	90000	7073	BULK
M740060	M60	60	54	132	1578	1154	115000	4608	BULK

Note: All break loads are determined by clevis pin and thread

Body with threaded bronze inserts

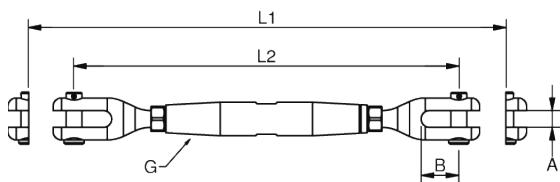

With an increasing demand for larger wire sizes, we have expanded our range of large machined fittings.

Body with threaded bronze inserts.

From Ø28 mm wire/M48 forks are supplied with countersunk and double headed pins.


RIGGING SCREWS MACHINED FORK/TERMINAL

Polished stainless steel - AISI 316

ART. NO.	G	WIRE	PIN	A	B	D	L1	L2	BL/KG	KG/100	PACK
741220	M20	12	19	20	45	20	646	492	11400	240	BULK
741422	M22	14	22	22	49	25	720	540	15000	649	BULK
741622	M22	16	22	22	49	28	745	565	15000	670	BULK
741624	M24	16	25	25	52	28	863	630	18000	876	BULK
741927	M27	19	28	30	55	34,5	963	728	23000	1332	BULK
742230	M30	22	32	35	67	40,5	1082	820	28000	1888	BULK
742636	M36	26	35	35	67	46	1186	912	41000	2484	BULK
M742848	M48	28	46	43	106	50	1441	1095	70000	3261	BULK
M743052	M52	30	53	46	122	58	1590	1204	80000	4294	BULK
M743256	M56	32	53	46	122	58	1682	1264	90000	4852	BULK
M743660	M60	36	60	54	132	65	1807	1373	115000	6133	BULK

Note: All break loads are determined by clevis pin and thread

Body with threaded bronze inserts

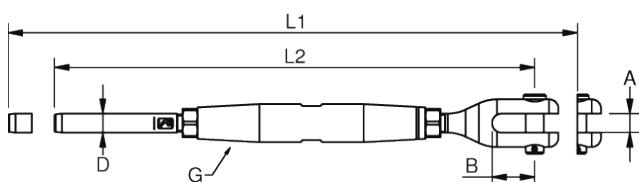



SWAGE
 PRESS
 CRIMP
 SCREW


RIGGING SCREWS FORK/TERMINAL

Polished stainless steel - AISI 316

ART. NO.	G	WIRE	PIN	A	B	D	L1	L2	BL/KG	KG/100	PACK
120205	M5	2	5	7,5	9,4	5,5	198	144	800	4,5	10
122505	M5	2,5	5	7,5	9,4	5,5	201	147	800	4,6	10
120306	M6	3	5	7,5	9,4	6,35	232	170	1200	8,5	10
120306X	M6	3	6	9,5	10,4	6,35	233	171	1200	8,5	10
120406	M6	4	5	7,5	10,4	7,5	242	180	1200	8,7	10
120406X	M6	4	6	9,5	10,4	7,5	242	180	1200	9,1	10
120408	M8	4	6	9,5	10,4	7,5	275	199	1600	13	10
120408X	M8	4	8	11	12,2	7,5	277	201	1700	13	10
120508	M8	5	6	9,5	13	9	281	205	1600	13,2	10
120508X	M8	5	8	11	12,2	9	284	208	2200	14,8	10
120510	M10	5	8	11	14	9	312	228	2500	22,5	10
120510X	M10	5	9,5	12,5	14	9	316	236	2500	22,5	10
120610	M10	6	8	11	17	12,6	328	248	3200	28,3	10
120610X	M10	6	9,5	12	18,5	12,58	330	250	3500	27,4	10
120612	M12	6	12	14	14	12,58	393	287	5100	47,5	5
120712	M12	7	12	14	25	14,2	401	295	5100	50	5
120812	M12	8	12	14	25	16	416	310	5100	53,5	5
120714	M14	7	12	14	25	14,2	439	319	6800	58	5
* 120714X	M14	7	14	18	32	14,2	453	335	6800	68,8	5
120814	M14	8	12	14	25	16	453	333	6800	63,5	5
* 120816	M16	8	14	18	32	16	498	365	8700	89,5	5
* 120816L	M16	8	14	22	30	16	494	361	8700	89,5	5
120816X	M16	8	16	17	32,5	16	496	374	8700	89,5	5
121016	M16	10	14	18	33	17,8	506	373	9400	93	5
121016L	M16	10	14	22	33	17,8	504	371	9400	93	5
121016X	M16	10	16	18	33	17,8	510	376	9400	93	5
121020	M20	10	19	24	48	17,8	587	427	9700	170,1	BULK
121220	M20	12	19	24	48	20	603	453	11400	170,1	BULK
* 121220X	M20	12	19	24	48	21,4	622	462	14200	170,1	BULK
121422	M22	14	22	30	58	25	590	555	15900	452	BULK
* 121622	M22	16	22	30	57,5	28	696	588	18000	490	BULK
121424	M24	14	25,4	30	47,8	25	846	613	15900	642	BULK
121624	M24	16	25,4	30	62	28	874	644	19400	662	BULK
121927	M27	19	28	32	68	34,5	968	734	23000	500	BULK
122027	M27	20	28	32	68	34,5	968	734	23000	646,9	BULK
122230	M30	22	32	35	76	40,5	1076	814	28000	1074	BULK
122636	M36	26	35	40	86	46	1195	921	41000	1682	BULK

* Note: Terminal OD. = 21,4 mm

! M20 > M36 available with threaded bronze inserts in stainless steel body

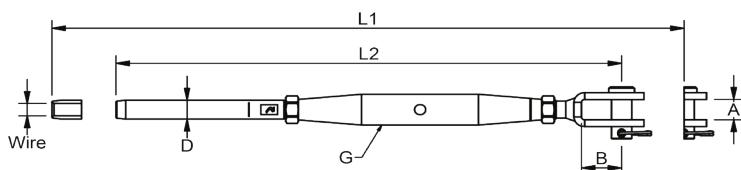


RIGGING SCREWS TOGGLE/TERMINAL

Polished stainless steel - AISI 316

ART. NO.	G	WIRE	PIN	A	B	D	L1	L2	BL/KG	PACK
320306	M6	3	6,35	8	17	6,35	271	201	1200	BULK
320408	M8	4	8	10	20	7,5	310	240	1700	BULK
320510	M10	5	9,5	12	26	9	361	278	2500	BULK
320612X	M12	6	12,7	18	35	12,58	448	340	5100	BULK
320712X	M12	7	12,7	18	35	14,2	456	348	5100	BULK
320812X	M12	8	12,7	18	35	16	471	363	5100	BULK
320816X	M16	8	16	20	41	16	566	436	8000	BULK
321020X	M20	10	19	24	45	17,8	642	488	9700	BULK
321220X	M20	12	19	24	45	20	661	507	11400	BULK
321220XX	M20	12	19	24	45	21,4	677	523	14200	BULK
321422X	M22	14	22	26	49	25	808	627	15900	BULK
321624X	M24	16	25,4	29	59	28	963	730	19400	BULK
321927X	M27	19	28	34	60	34,5	1071	836	25500	BULK
322230X	M30	22	32	40	69	40,5	1193	931	31000	BULK
322636X	M36	26	36	44	77	46	1319	1045	43000	BULK

M20 > M24 available with threaded bronze inserts in stainless steel body

Note: All break loads are determined by clevis pin and thread

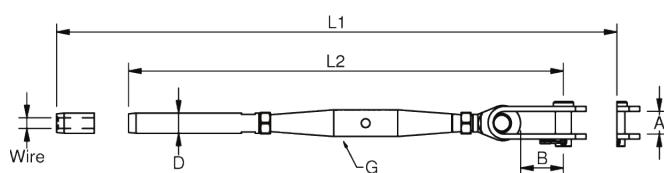


RIGGING SCREWS EYE/TERMINAL

Polished stainless steel - AISI 316

ART. NO.	G	WIRE	A	D1	D2	D3	L1	L2	BL/KG	KG/100	PACK
190205	M5	2	3	2,2	5,5	5,5	205	143	800	3,7	BULK
192505	M5	2,5	3	2,8	5,5	5,5	208	146	800	3,4	BULK
190306	M6	3	4	3,5	6,35	6,5	234	166	1200	6,3	BULK
190406	M6	4	4	4,4	7,5	6,5	244	176	1200	6,7	BULK
190408	M8	4	5	4,4	7,5	8,5	282	202	1700	12,4	BULK
190508	M8	5	5	5,3	9	8,5	288	208	2200	13,4	BULK
190510	M10	5	6	5,3	9	10,5	311	227	2500	19,5	BULK
190610	M10	6	6	6,5	12,58	10,5	326	242	3400	23,4	BULK
190612	M12	6	8	6,5	12,58	13	379	271	5000	38,5	BULK
190712	M12	7	8	7,5	14,2	13	387	279	5000	40,8	BULK
190812	M12	8	8	8,4	16	13	400	292	5000	51,1	BULK
190714	M14	7	9	7,5	14,2	13	432	314	6800	46,7	BULK
190814	M14	8	9	8,4	16	13	446	328	6800	55,1	BULK
190816	M16	8	10	8,4	16	14,5	478	350	8700	74,6	BULK
191016	M16	10	10	10,5	17,8	14,5	495	367	9400	86,6	BULK
191020	M20	10	15	10,5	17,8	19,5	593	405	9700	126,9	BULK
1912T20	M20	12	15	12,5	20	19,5	573	419	11500	136,9	BULK
1912T20X	M20	12	15	12,5	21,4	19,5	599	435	14200	152,8	BULK
191422X	M22	14	18	14,8	25	23	708	527	15200	163,8	BULK
191624X	M24	16	20	17	28	26	846	613	17700	233,6	BULK
191927X	M27	19	25	20	34,5	28,5	934	702	23000	394	BULK
192230X	M30	22	30	23,5	40,5	33	1057	777	28000	1090,4	BULK
192636X	M36	26	30	27,5	46	36	1150	873	41000	1446,8	BULK

M20 > M36 available with threaded bronze inserts in stainless steel body

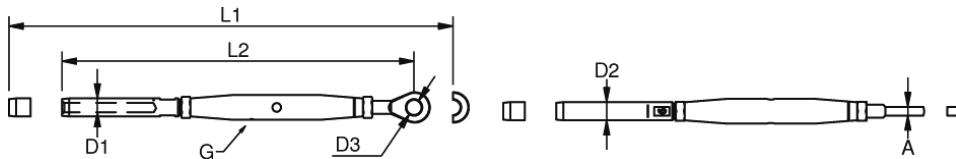




RIGGING SCREWS EYE/FORK

Polished stainless steel - AISI 316

ART. NO.	G	PIN	A1	A2	B	D1	D2	L1	L2	BL/KG	KG/100	PACK
191205	M5	5	7,5	3	12	5,5	12	188	129	800	4,2	BULK
191206	M6	5	7,5	4	12	6,5	14	206	138	1000	6,3	BULK
191208	M8	6	9,5	5	13	8,5	17	244	164	1600	13	BULK
191210	M10	8	11	6	15	10,5	21	271	188	3200	21,9	BULK
191212	M12	12	14,5	8	25	13	25	343	235	5100	44	BULK
191214	M14	12	14,5	9	25	13	28	381	262	6900	60	BULK
191216	M16	14	18	10	33	14,5	31	426	296	9400	85,6	BULK
191220	M20	19	24	15	50	19,5	40	518	364	14000	169,3	BULK
191222	M22	22	30	18	57	23	47	625	444	15200	398,5	BULK
191224	M24	25,4	30	20	62	26	53	741	508	17700	580	BULK

M20 > M24 available with threaded bronze inserts in stainless steel body

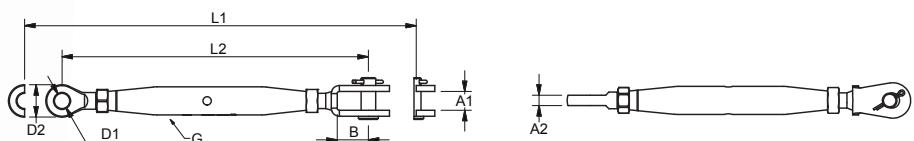


RIGGING SCREWS EYE/EYE

Polished stainless steel - AISI 316

ART. NO.	G	A	D1	D2	L1	L2	BL/KG	KG/100	PACK
191905	M5	3	5,5	12	190	131	800	4	10
191906	M6	4	6,5	14	204	136	1200	11	10
191908	M8	5	8,5	17	244	164	2200	14	5
191910	M10	6	10,5	22	270	187	3500	23	5
191912	M12	8	13	25	334	226	5100	38	5
191914	M14	9	13	28	376	257	6800	51	BULK
191916	M16	10	14,5	31	408	278	9400	73	BULK
191920	M20	15	19,5	40	488	334	14700	105	BULK
191922	M22	18	23	47	597	416	15200	354	BULK
191924	M24	20	26	53	713	480	17700	670	BULK
191927	M27	25	28,5	65	759	527	23000	710	BULK
191930	M30	30	33	70	861	581	28000	991	BULK
191936	M36	30	36	80	892	618	41000	1288	BULK

Note: All break loads are determined by eye (D1) and thread

! M20> M36 available with threaded bronze inserts in a stainless steel body

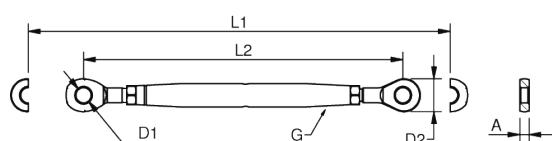


RIGGING SCREWS TERMINAL/TERMINAL

Polished stainless steel - AISI 316

ART. NO.	G	WIRE	D1	D2	L1	L2	BL/KG	KG/100	PACK
120205T	M5	2	2,2	5,5	223	162	800	4	BULK
122505T	M5	2,5	2,8	5,5	228	165	800	4	BULK
120306T	M6	3	3,5	6,35	274	204	1200	6	BULK
120406T	M6	4	4,4	7,5	284	214	1200	8	BULK
120408T	M8	4	4,4	7,5	312	242	1700	13	BULK
120508T	M8	5	5,3	9	328	258	2200	15	BULK
120510T	M10	5	5,3	9	350	267	2500	21	BULK
120610T	M10	6	6,5	12,58	380	297	3500	21	BULK
120612T	M12	6	6,5	12,58	410	327	5100	42	BULK
120712T	M12	7	7,5	14,2	454	346	5100	47	BULK
120714T	M14	7	7,5	14,2	488	369	6800	57	BULK
120812T	M12	8	8,4	16	490	382	5100	55	BULK
120814T	M14	8	8,4	16	521	402	6900	65	BULK
120816T	M16	8	8,4	16	548	418	8700	83	BULK
121016T	M16	10	10,5	17,8	566	436	9400	87	BULK
121020T	M20	10	10,5	17,8	620	466	9700	135	BULK
121220T	M20	12	12,5	20	658	504	11400	149	BULK
121220XT	M20	12	12,5	21,4	658	504	14200	149	BULK
121422T	M22	14	14,8	25	820	639	15900	378	BULK
121622T	M22	16	17	28	870	689	18000	416	BULK
121624T	M24	16	17	28	979	746	19400	553	BULK
121927T	M27	19	20	34,8	1114	879	23000	801	BULK
122230T	M30	22	23,5	40,5	1245	983	28000	1179	BULK
122636T	M36	26	27,5	46	1402	1128	41000	1589	BULK

M20 > M36 available with threaded bronze inserts in stainless steel body

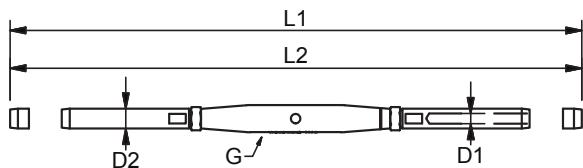


RIGGING SCREWS SWAGELESS/BLANK

Polished stainless steel - AISI 316

Left side blank

ART. NO.	G	WIRE	L1	L2	KW 1	KW 2	BL/KG	KG/100	PACK
870306	M6	3	168	134	12	10	750	6	BULK
870406	M6	4	175	141	14	12	1200	6,7	BULK
870408	M8	4	202	162	14	12	1500	11,6	BULK
870508	M8	5	211	171	16	13	2180	13,8	BULK
870510	M10	5	222	181	16	13	2180	18,5	BULK
870610	M10	6	233	192	19	16	3500	22,7	BULK
870612	M12	6	277	223	19	16	3700	33,5	BULK
870712	M12	7	277	223	21	19	4700	33,5	BULK
870714	M14	7	311	253	21	18	4700	44,1	BULK
870812	M12	8	294	240	24	19	5100	43,5	BULK
870814	M14	8	320	262	24	19	5600	49,5	BULK
870816	M16	8	348	283	24	19	5600	63,1	BULK
871016	M16	10	356	291	27	24	8000	75,7	BULK
871220	M20	12	417	340	32	27	12000	131,7	BULK
871422	M22	14	501	410	36	30	14000	334,6	BULK
871624	M24	16	598	463	41	32	20000	497,1	BULK

Note: All break loads are determined by thread and wedges (jaws)

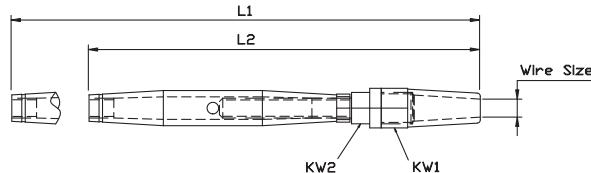

See
swageless
section on page
28 for more
swageless
fittings



The "one side blank" rigging screw is assembled with a right threaded swageless terminal. It is ideal for on site work where a professional swaging would normally be required and the final attachment has not been decided upon as the choice of fitting for the blank side is optional. See instructions page 13.



WIRE TERMINALS

See small
fittings section
on page 36
for small wire
terminals

WELDED FORK TERMINALS

Polished stainless steel - AISI 316



SWAGE PRESS CRIMP SCREW


The wide range of hand welded fork terminals by Blue Wave has been setting standards for many years. Featured here are the most common sizes and fork variations; all with wire size and swage depth marking.

Small fork head design is "square", from Ø 19 mm pin up the design is "rounded".

Fork terminals are amongst the most commonly used wire end fittings. They are normally attached to pre drilled anchor plates or steel constructions. Also used in combination with toggles, eyes or U bolts.

ART. NO.	WIRE	PIN	A	B	D	L1	L2	BL/KG	KG/100	PACK	
100502	2	1/16"	5	7,5	12	5,5	50	24	800	2	25
100525	2,5	3/32"	5	7,5	12	5,5	53	27	800	2	25
100503	3	-	5	7,5	12	6,35	67	38	800	2,3	25
100532	-	1/8"	5	7,5	12	6,35	68	38	800	2,3	25
100603	3	-	6	9,5	13	6,35	68	38	1300	2,8	25
100632	-	1/8"	6	9,5	13	6,35	68	38	1300	2,8	25
100504	4	5/32"	5	7,5	12	7,5	71	45	800	2,7	25
100604	4	5/32"	6	9,5	13	7,5	73	45	1500	3,4	25
100804	4	5/32"	8	11	15	7,5	77	45	1700	4,9	25
100605	5	3/16"	6	9,5	13	9	83	51	1500	4,1	25
100805	5	3/16"	8	11	15	9	87	51	2400	5,5	10
109505	5	3/16"	9,5	12	19	9	91	51	2400	7,2	10
100806	6	-	8	11	15	12,58	99	64	3200	10	10
109506	6	-	9,5	12	19	12,58	104	64	3800	11,3	10
101206	6	-	12	14	25	12,58	110	64	5200	17,6	10
101207	7	9/32"	12	14	25	14,2	119	70	6500	18,1	10
101208	8	5/16"	12	14	25	16	136	83	6500	21,6	10
101408	8	-	14	18	33	16	143	83	8000	32,5	10
101608	8	5/16"	16	17	33	16	145	83	8000	25,5	10
101410	10	-	14	18	32	17,8	151	89	9400	35	10
101410L	10	-	14	22	30	17,8	149	89	9400	36	10
101610	10	-	16	17	33	17,8	149	89	9400	36,6	10
101910	10	-	19	24	48	17,8	168	89	9400	47,7	5
101612	12	-	16	17	33	20	174	105	11200	60	5
101612L	12	-	16	22	31	20	171	105	11200	60	5
101912	12	-	19	24	48	20	189	105	11200	66	5
101912L	12	-	19	30	47	20	187	105	11200	66	5
*101912X	12	-	19	24	48	21,4	205	120	14000	75	5
101914	14	-	19	24	50	25	221	140	15000	75	5
101914L	14	-	19	30	47	25	221	140	15000	75	5
102214	14	-	22	30	57	25	232	140	15000	112,7	5
102216	16	-	22	30	57	28	260	160	19400	141	5
102514	14	-	25,4	30	62	25	235	140	15000	125	5
102516	16	-	25,4	30	62	28	264	160	19000	140	5
102819	19	-	28	32	68	34,5	309	200	27000	246	BULK
102820	20	-	28	32	38	34,5	309	200	25000	244	BULK
103222	22	-	32	35	76	40,5	354	230	34000	372	BULK
103526	26	-	35	40	86	46	420	280	45000	548	BULK


*Note: Terminal OD = 21,4

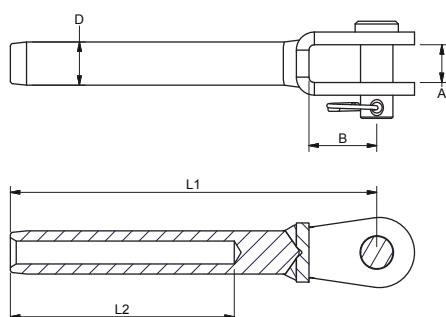

MACHINED FORK TERMINALS

Polished stainless steel - AISI 316

ART. NO.	WIRE	PIN	A	B	D	L1	L2	BL/KG	KG/100	PACK
721912	12	19	20	45	20	197	105	9500	100	BULK
722214	14	22	22	49	25	239	140	15000	170	BULK
722516	16	25,4	25	52	28	271	160	19000	210	BULK
722819	19	28	30	55	34,5	327	200	27000	330	BULK
723222	22	32	35	67	40,4	377	230	35000	480	BULK
723526	26	35	35	67	46	434	280	48000	700	BULK
M724628	28	46	43	106	50	499	295	70000	1191	BULK
M725330	30	53	46	122	58	542	315	80000	1756	BULK
M725332	32	53	46	122	58	562	335	90000	1758	BULK
M726036	36	60	54	132	65	630	375	115000	2513	BULK

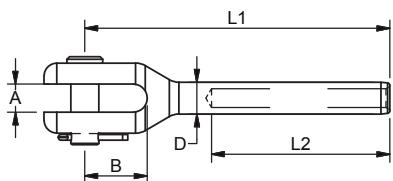


As demand for larger wire sizes has been growing, so has the range of larger machined fittings by Blue Wave. The machined forks are, as most fittings by Blue Wave, marked with wire size and swage depth marking for ease of use. From Ø28 mm wire/M48 forks are supplied with countersunk and double headed pins.



TAMPER PROOF FORK TERMINAL

Polished stainless steel - AISI 316

ART. NO.	WIRE	PIN	A	B	D	L1	L2	BL/KG	KG/100	PACK	
BST720503	3	1/8"	5	5	12	6,35	61	38	1200	1,9	BULK
BST720504	4	5/32"	5	5	12	7,5	68	45	1200	2,4	BULK

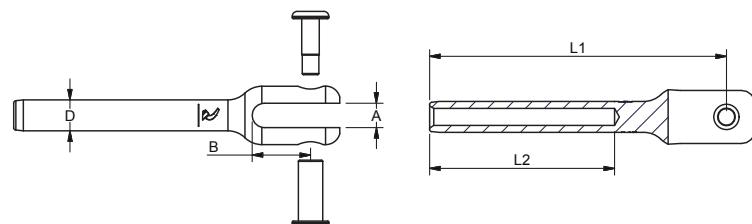


AIRCRAFT FORK TERMINAL - ACCORDING TO MS20667

Polished stainless steel - AISI 316



ART. NO.	WIRE	PIN	A	B	D1	L1	L2	BL/KG	KG/100	PACK
ACF4516	- 1/16"	5	2,5	12,7	4	40	26	600	0,7	10
ACF4502	2 -	5	2,8	12,7	5,5	49	32	1190	1,2	10
ACF4525	2,5 3/32"	5	2,8	12,7	5,5	49	32	1050	1,2	10
ACF4503	3 -	5	5,2	18,7	6,35	60	38	1380	1,8	10
ACF4532	- 1/8"	5	5,2	18,7	6,35	60	38	1320	1,7	10
ACF0604	4 5/32"	6,35	5,2	18	7,5	67	45	1730	2,5	10
ACF0805	5 3/16"	8	6,35	22,2	9	78	51	2492	4,5	10
ACF0855	- 7/32"	8	7,9	24,6	10,8	87	57	3900	6,8	10
ACF9506	6 -	10	7,9	27	12,58	97	64	5460	10,7	10
ACF95635	- 1/4"	10	7,9	27	12,58	97	64	5270	10,6	10
ACF1107	7 9/32"	11	8,3	25,4	14,2	105	70	6840	15,1	10
ACF1108	8 5/16"	11	8,7	32,1	16	113	76	8650	19,3	10
ACF1395	- 3/8"	12,7	9,5	38,9	17,8	135	89	10200	27,5	10
ACF1410	10 -	14	9,5	45,2	20	163	102	13647	44,7	5
ACF1411	- 7/16"	14	9,5	45,2	20	163	102	12600	43,2	5
ACF1612	12 -	16	11,9	48,4	21,4	176	119	14210	50,6	5
ACF1613	- 1/2"	16	11,9	48,4	21,4	176	119	12980	48,6	5

SWAGE
 PRESS
 CRIMP
 SCREW

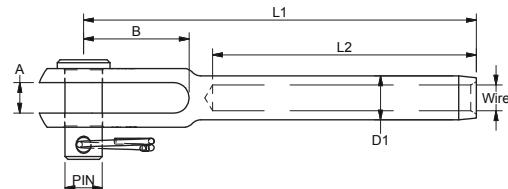

TOGGLE TERMINAL



Polished stainless steel - AISI 316

ART. NO.	WIRE	PIN	A	B	D1	D2	L1	L2	L3	BL/KG	KG/100	PACK	
500503G	3	-	5	7	11,5	3,5	6,35	78	38	12	1000	3,1	10
500532G	-	1/8"	5	7	11,5	3,5	6,35	78	38	12	1000	3,1	10
500603	3	-	6,35	8	17	3,5	6,35	81	38	14	1300	4,3	10
500632	-	1/8"	6,35	8	17	3,5	6,35	81	38	14	1300	4,3	10
500504G	4	5/32"	5	7	11,5	4,4	7,5	85	45	12	1000	3,5	10
506304G	4	5/32"	6,35	7	14	4,4	7,5	91	45	12	1400	4,8	10
500804	4	5/32"	8	10	25	4,4	7,5	94	45	18	1700	7,3	10
506305G	5	3/16"	6,35	10	14	5,3	9	99	51	12	1400	5,7	10
509505	5	3/16"	9,5	12	27	5,3	9	116	51	23	2400	13,8	10
* 506306G	6	-	6,35	10	14	6,5	9	85	40	12	1400	6,9	10
501106X	6	-	11	15	29	6,5	12,58	135	64	30	5500	27,3	10
501206X	6	-	12,7	18	33	6,5	12,58	151	64	30	5500	33,4	5
501207X	7	9/32"	12,7	18	33	7,5	14,2	157	70	30	6200	35,7	5
501208D	8	5/16"	12,7	18	33	8,4	13	170,5	83	30	4600	36	5
501308	8	5/16"	12,7	18	33	8,4	16	170	83	30	6200	37,5	5
501608X	8	5/16"	15,9	20	41	8,4	16	198	83	35	8700	59,7	5
501610	10	-	15,9	20	41	10,5	17,8	192	89	35	9700	64,3	5
501910X	10	-	19	24	43	10,5	17,8	228	100	40	9700	100	BULK
501912	12	-	19	24	43	12,5	20	220	105	40	11400	98,8	BULK
501912X	12	-	19	24	43	12,5	21,4	240	120	40	14200	103	BULK
502214	14	-	22	26	47	14,8	25	277	140	50	15900	170,2	BULK
502516	16	5/8"	25,4	29	60	17	28	313	160	60	19400	265,5	BULK
502819	19	3/4"	28	34	63	20	34,5	399	200	60	25500	612	BULK
503222	22	7/8"	32	40	73	23,5	40,4	463	230	75	31000	570	BULK
503526	26	1"	36	44	80	27,5	46	518	280	85	43000	750	BULK

*Note: Terminal OD = 9 mm



The flexible Blue Wave toggle terminal is marked with wire size and wire hole depth thereby making it easier to work with and to press or swage onto the wire. Its uses are for diagonal or angle installations and also to minimize the risk of fatigue due to sideway loads.

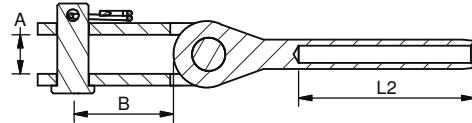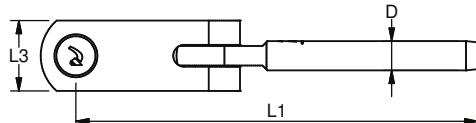




EYE TERMINALS

Polished stainless steel - AISI 316

Blue Wave eye terminals are engraved with the wire size and swage depth thereby making them easier to work with and to press or swage onto the wire. Eyes are mainly used as an attachment to rigging screws or forks.



ART. NO.	WIRE	T	B	D1	D2	L1	L2	BL/KG	KG/100	PACK
190002	2	1/16"	3	12	5,5	5,5	41	24	1200	0,9
190025	2,5	3/32"	3	12	5,5	5,5	44	27	1000	0,8
190003	3	-	4	14	6,35	6,5	60	38	1300	1,3
190332	-	1/8"	4	14	6,35	6,5	60	38	1300	1,4
190004	4	5/32"	5	17	7,5	8,5	67	45	1700	2,3
190005	5	3/16"	6	21	9	10,5	79	51	2400	3,9
190006	6	-	8	25	12,58	13	94	64	5500	8,7
190006X	6	-	10	28	12,58	13,2	105	64	5500	11,2
190007	7	9/32"	9	27	14,2	13	104	70	6800	11,5
190007X	7	9/32"	10	28	14,2	13,2	110	70	6800	13,5
190008	8	5/16"	10	30	16	14,5	124	83	8000	17
190008D	8	5/16"	10	30	13	14,5	123,5	83	4600	13,5
190008X	8	5/16"	12	36	16	16,5	141	83	8700	23,5
190010	10	-	11	35	17,8	16,3	137	89	9700	25
190010X	10	-	16	40	17,8	19,5	165	100	9700	38
190012	12	-	15	40	20	19,3	156	105	11400	41,5
190012X	12	-	15	42	21,4	19,5	178	120	14200	41
190014	14	-	18	47	25	23	206	140	15900	75,6
190016	16	-	20	53	28	26	232	160	19000	102
190019	19	-	25	65	34,5	28,5	302	200	31000	209
190020	20	-	25	65	34,5	28,5	302	200	31000	199,8
190022	22	-	30	70	40,4	33	348	230	42000	314
190026	26	-	30	77	46	36,5	400	280	53000	425
190028	28	-	35	84	50	41,5	445	300	64000	602,4
BULK										

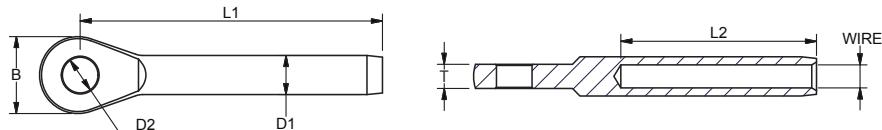


TERMINAL FOR TAMPER PROOF RIGGING SCREW

Polished stainless steel - AISI 316L




ART. NO.	G	WIRE	D	L1	L2	L3	BL/KG	KG/100	PACK
900306XL	M6	3	1/8"	6,35	127	75	38	1200	2,7
900406XL	M6	4	5/32"	7,5	137	75	45	1200	3,2
900506XL	M6	5	3/16"	9	143	75	51	1200	4,1

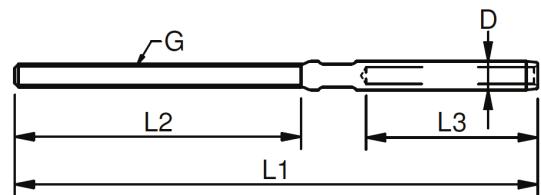

DOMEHEAD TERMINALS

Polished stainless steel - AISI 316

ART. NO.	WIRE	D1	D2	D3	L1	L2	L3	KG/100	PACK
660003	1/8"	6,35	10	3,5	52	48,5	38	1,1	20
660004	4	5/32"	7,5	11,5	4,4	59	55,5	45	2,4
660005	5	3/16"	9	14	5,3	66,5	62,5	51	3,8
660006	6	-	12,58	18	6,5	79	74	64	7,9

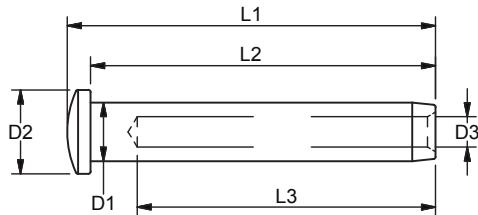


Domehead terminals by Blue Wave are engraved with wire size and swage depth marking thereby making them easier to work with and to press or swage onto the wire.



BALL TERMINAL

Polished stainless steel - AISI 316

ART. NO.	WIRE	D1	D2	L1	L2	L3	L4	KG/100	PACK
620003	3	-	3,5	6,35	58	54	38	1,1	20
620032	-	1/8"	3,5	6,35	58	54	38	1,1	20
620004	4	5/32"	4,4	7,5	69	63	45	2,4	20
620005	5	3/16"	5,3	9	79	72	51	3,8	20
620006	6	-	6,5	12,58	90	84	64	20	20
620007	7	9/32"	7,5	14,2	94	87	70	21,3	10
620008	8	5/16"	8,4	16	116	108	83	26,3	10
620010	10	-	10,5	17,8	129	119	89	27,5	10
620012	12	-	12,5	20	145	135	105	28	5

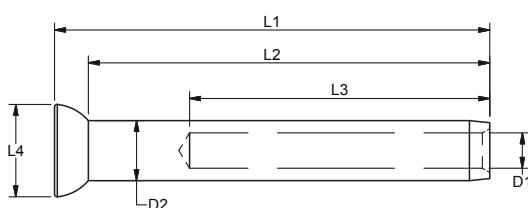

Blue Wave's ball terminals are marked with wire size and wire-hole depth to make it easier to work with and press or swage onto the wire.

More ball terminals available in the marine product range.



SWAGELESS TERMINALS

The Blue Wave swageless system provides safe and reliable machine-free swaging of wire. A fast and ideal solution for on site work where a professional swaging tool would normally be required. Some of the articles are Lloyd's approved.

See small
swageless
fittings on
page 38




SWAGELESS FORK TERMINALS

Polished stainless steel - AISI 316

ART. NO.	WIRE	PIN	A	B	L1	L2	L3	KW1	KW2	BL/KG	KG/100	ART.NO.RE-FIT JAWS
840603	3	1/8"	6	6	8	55	63	29	12	14	750	5,5
840804	4	5/32"	8	8	8	62	73	35	14	19	1500	7,3
841005	5	-	10	10	10	72	83	42	16	22	2180	15
841206	6	1/4"	12	12	12	82	95	48	19	27	3700	23
841207	7	9/32"	12	12	13	102	115	55	21	29	4700	29
841408	8	5/16"	14	14	14	103	118	58	24	30	5600	38
841610	10	-	16	16	16	117	135	70	27	36	8300	63
841912	12	-	19	18	16	142	162	75	32	42	12000	97
842214	14	-	22	21	19	162	191	88	36	46	14000	135
842516	16	-	25	23	22	184	217	102	41	55	23000	215

Note: All break loads are determined by wedges (jaws) and clevis pin

The Blue Wave swageless fork terminals are Lloyd's approved.
See instructions page 13.

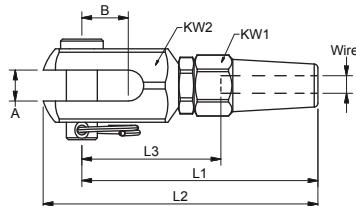


SWAGELESS WELDED FORK TERMINALS

Polished stainless steel - AISI 316

ART. NO.	WIRE	PIN	A	B	L1	KW	BL/KG	KG/100
840504	4	5	7,5	12	56,8	14	800	4,3
840505	5	5	7,5	12	56,8	14	800	4,5

Note: 7x7 and 7x19 wire construction only

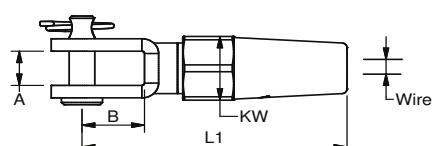


Small welded version of the swageless fork terminal.
Ø4 and Ø5 mm soft wires only.
See instruction page 13.



SWAGELESS CONE FORK TERMINAL

Polished stainless steel - AISI 316

ART. NO.	WIRE	PIN	A	B	C	KW	L1	L2	BL/KG	KG/100
SC842516	16 - 5/8"	25,4	22	47	26,5	42	200	100	28000	215,1
SC842819	19 - 3/4"	28	27	59	32,5	44	236	115	30000	292
SC843522	22 - 7/8"	34,8	32	72	70	50	275	125	38000	487,4
SC843526	26 - 1"	34,8	32	72	40	66	292	150	48000	693

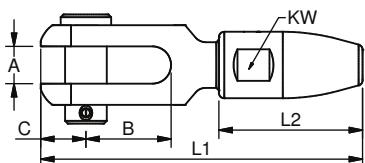


In addition to the Lloyd's approved swageless system, the swageless terminal for 1x19 wire construction enables safe and reliable wire attachment up till Ø 26 mm diameter. See instructions page 15.



SWAGELESS CONE TOGGLE TERMINAL

Polished stainless steel - AISI 316

ART. NO.	WIRE	PIN	A	B	C	KW	L1	L2	BL/KG	KG/100
SC830804	4 5/32"	8	10	20	9	12	85	27	2200	8,7
SC831047	- 3/16"	9,5	12	26	12	14	102	30	2800	16,1
SC831005	5 -	9,5	12	26	12	14	102	30	2800	16,1
SC831355	- 7/32"	12,7	18	36	18	17	132	38	5000	30,2
SC831306	6 -	12,7	18	36	18	17	132	38	5000	30,2
SC831363	- 1/4"	12,7	18	36	18	17	132	38	5000	30,2
SC831307	7 9/32"	12,7	18	35	18	19	145	46	6000	35,8
SC831308	8 5/16"	12,7	18	35	18	22	158	54	6000	42,5
SC831608	8 5/16"	16	20	41	20	22	173	54	8000	64,7
SC831695	- 3/8"	16	20	41	20	27	187	64	9800	77,5
SC831995	- 3/8"	19	24	45	25	27	202	64	11000	110,3
SC831610	10 -	16	20	41	20	27	187	64	9800	77,4
SC831910	10 -	19	24	45	25	27	202	64	11000	110,3
SC831911	- 7/16"	19	24	45	25	33	226	82	17000	141,4
SC831912	12 -	19	24	45	25	33	226	82	17000	141,4
SC831913	- 1/2"	19	24	45	25	33	226	82	17000	141,4
SC832214	14 9/16"	22	26	48	30	37	247	89	23000	203,2
SC832516	16 5/8"	25,4	29	61	37	42	285	100	28000	310,6
SC832819	19 3/4"	28	34	65	34	44	319	115	30000	413,7
SC833522	22 7/8"	34,8	44	83	41	50	377	125	38000	670,5
SC833526	26 1"	34,8	44	83	41	66	403	150	48000	886,6

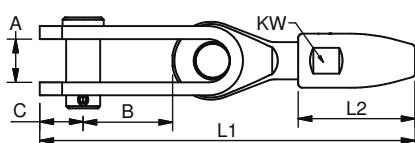

In addition to the Lloyd's approved swageless system, the swageless terminal for 1x19 wire construction enables safe and reliable wire attachment up till Ø 26 mm diameter. See instructions page 15.





SWAGELESS EYE TERMINALS


Polished stainless steel - AISI 316

ART. NO.	WIRE	A	D	L1	L2	KW1	KW2	BL/KG	KG/100	ART.NO. RE-FIT JAWS
821903	3	1/16"	5,5	6,5	58,6	50,1	13	12	750	4
821904	4	5/32"	7	8,5	71,4	60,4	13	14	1500	7,3
821905	5	-	8	10,5	81,5	69,5	17	16	2180	9,8
821906	6	1/4"	9	13	96	82	19	19	3700	15
821907	7	9/32"	9	13,2	105	89,5	22	22	4700	21,2
821908	8	5/16"	10	14,5	117	100,5	24	24	5600	28,1
821910	10	-	13	16,2	137	117	27	27	8300	46
821912	12	-	15	19,5	161	139,5	32	32	12000	72
821914	14	-	18	23	187,6	161,6	36	36	14000	110
821916	16	-	20	26	214	185	41	41	23000	160

Note: All break loads are determined by wedges (jaws) and eye (D)



The Blue Wave swageless eye terminals are Lloyd's approved.
See instructions page 13.

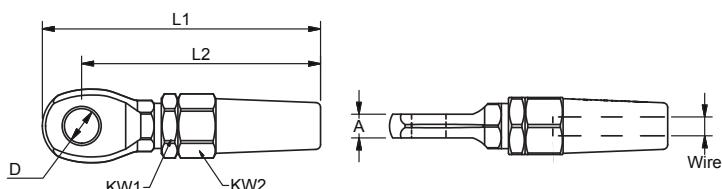


SWAGELESS CONE EYE TERMINAL

Stainless steel - AISI 316

ART. NO.	WIRE	D	T	KW	L1	L2	L3	L4	L5	L6	BL/KG	KG/100
SC822516	16	5/8"	26	20	42	187	100	28	69	55	62	28000
SC822819	19	3/4"	28,5	25	44	220	115	33	83	65	78	30000
SC823522	22	7/8"	35,5	30	50	250	125	40	100	80	90	38000
SC823526	26	1"	35,5	30	66	280	150	40	100	80	90	48000
												535

In addition to the Lloyd's approved swageless system, the swageless cone terminal for 1x19 wire construction enables safe and reliable wire attachment up till Ø 26 mm diameter. See instructions page 15.

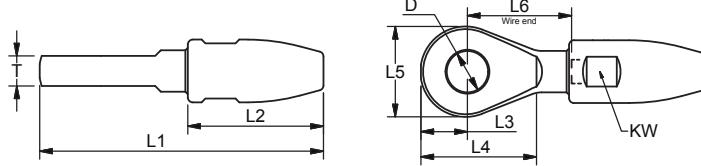


SWAGELESS CONE THREAD TERMINAL

Stainless steel - AISI 316

ART. NO.	WIRE	G	L1	L2	KW1	KW2	BL/KG	KG/100
SC801624	16	5/8"	M24	318	170	42	32	21000
SC801927	19	3/4"	M27	344	180	44	34	23000
SC802230	22	7/8"	M30	392	200	50	41	28000
SC802636	26	1"	M36	446	220	66	50	41000
								698,2

In addition to the Lloyd's approved swageless system, the swageless cone terminal for 1x19 wire construction enables safe and reliable wire attachment up till Ø 26 mm diameter. See instructions page 15.

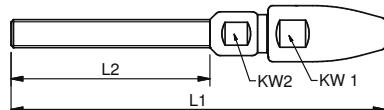


SWAGELESS THREAD TERMINALS

Polished stainless steel - AISI 316

ART. NO. RIGHT	ART. NO. LEFT	G	WIRE	L1	L2	L3	KW	KW1	BL/KG	KG/100
800305	810305	M5	3	79	58	42	10	12	750	4,2
800306	810306	M6	3	85	63	47	10	12	750	4,5
800406	810406	M6	4	92	63	47	12	14	1200	5,6
800408	810408	M8	4	102	72	57	12	14	1500	6,6
800508	810508	M8	5	111	78	57	13	16	2180	9
800510	810510	M10	5	117	84	63	13	16	2180	10
800610	810610	M10	6	128	90	63	16	19	3500	15
800612	810612	M12	6	145	107	80	16	19	3700	17
800712	810712	M12	7	153	110	80	18	21	4700	22
800714	810714	M14	7	162	119	89	18	21	4700	25
800812	810812	M12	8	162	113	80	19	24	5100	28
800814	810814	M14	8	171	122	89	19	24	5600	31
800816	810816	M16	8	182	133	100	19	24	5600	40
801016	811016	M16	10	190	139	100	24	27	8300	48
801220	811220	M20	12	227	159	120	27	32	12000	79
801422	811422	M22	14	264	191	140	30	36	17000	124
801624	811624	M24	16	308	227	170	32	41	21000	175

Note: All break loads are determined by wedges (jaws) and thread

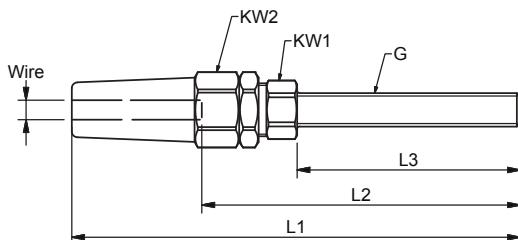


The swageless thread terminal is Lloyd's approved and also available with UNF thread on request.
See instructions page 13.



DIY TERMINAL

Stainless steel - AISI 316

ART. NO. RIGHT	ART. NO. LEFT	G	WIRE	D1	L1	L2	L3	L4	BL/KG	KG/100
A640305	-	M5	3	11	53	8	36	34	300	3,4
A640406	-	M6	4	13	58	9	38	37	400	5,4
A640406L	A630406L	M6	4	13	58	20	38	50	400	7
A640506	-	M6	5	14	65	9	45	37	500	6,4
A640608	-	M8	6	16	73	12	47	45	600	10,7

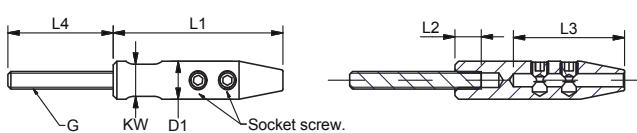

The Do It Yourself terminal is a simple alternative to the swageless terminals as it is fixed to the wire only by use of "allen-headed" screws. Break loads are, therefore, lower than average. The terminals are delivered with external right handed thread stud only, but as this can be removed, they can be combined with the rest of the WDS program and thus offer a wide range of possible DIY solutions. The fittings can be reused and are as such a good solution for private use.

The DIY terminal has inside thread - delivered with removable thread pin



SMALL RIGGING SCREWS AND TERMINALS


Blue Wave's small fittings for lighter architectural fixing of wires. The focus of the design is the size. Overall dimensions have thus been reduced to a minimum. The small fittings are suitable for hand crimping or roll swaging by using a standard machine and smaller die.



SMALL RIGGING SCREWS FORK/FORK

Polished stainless steel - AISI 316L

ART. NO.	G	PIN	A	B	L1	L2	BL/KG	KG/100
A12120505	M5	5	7,5	12	143	106	800	3,7
A12120506	M6	5	7,5	12	155	111	1250	5,7
A12120606	M6	6	9,5	13	159	115	1250	6,7
A12120808	M8	8	11	15	186	140	2350	11,3
A12121010	M10	8	11	15	204	157	2350	19,2
A12121212	M12	9,5	12	19	248	200	3500	32,1

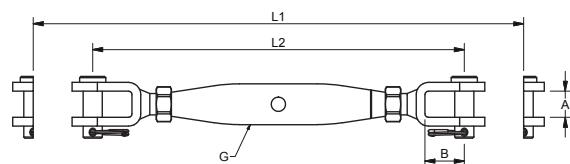

A short version of the classic closed rigging screw.


See page
16 for more
rigging
screws



SMALL RIGGING SCREWS FORK/TERMINAL

Polished stainless steel - AISI 316L

ART. NO.	G	WIRE	PIN	A	B	D	L1	L2	L3	BL/KG	KG/100	
A120305	M5	3	1/8"	5	7,5	12	5,5	153	117	25	360	3,1
A120406	M6	4	5/32"	5	7,5	12	6,35	166	122	25	640	4,9
A120506	M6	5	3/16"	6	9,5	13	7,5	176	132	30	1000	5,9
A120608	M8	6	-	8	11	15	9	209	163	40	1400	10,4
A120810	M10	8	5/16"	8	11	15	12,58	235	187	50	2300	18,7
A121012	M12	10	-	9,5	12,5	19,5	16	264	216	60	3600	31,8

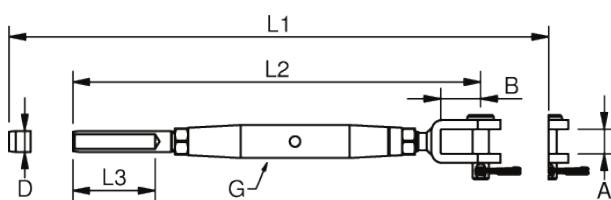


A short version of our classic rigging screw with small terminal.



SMALL BODIES

Polished stainless steel - AISI 316

ART. NO.	G	D	L	BL/KG	KG/100
A011205	M5	8	60	800	0,9
A011206	M6	10	65	1200	1,7
A011208	M8	14	80	2200	4,3
A011210	M10	17	90	3500	7
A011212	M12	23	120	5100	11,3

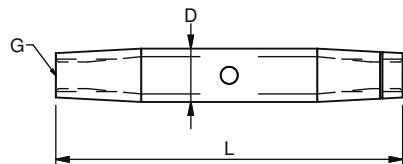

See page
39 for more
bodies





In order to match the small WDS fittings, the small bodies have less adjustment but also feature thread size and "easy use" marking for left and right threaded side and adjustment hole.

SMALL MACHINED THREAD FORK

Stainless steel - AISI 316

ART. NO. RIGHT	ART. NO. LEFT	G	PIN	A	B	D	L1	L2	BL/KG	KG/100
A421205	A431205	M5	5	5,5	12	11	49	31	400	1,5
A421206	A431206	M6	5	6,5	15	13	58	36	800	2,3
A421208	A431208	M8	6	8,5	19	16	69	42	1200	4,2

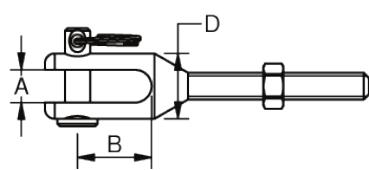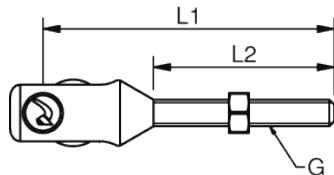



Small machined forks with thread and pin for the small rigging screws, inside thread parts or other terminations. Available with left handed and right handed threads, incl. lock nut.

See page
40 for more
threaded
fittings

SMALL WELDED THREAD FORK

Stainless steel - AISI 316

ART. NO. RIGHT	ART. NO. LEFT	G	PIN	A	B	L1	L2	BL/KG	KG/100
A320503	A330503	M5	5	7,5	12	49	30	800	1,4
A320604	A330604	M6	5	7,5	12	54	35	1000	2
A320605	A330605	M6	6	9,5	13	56	35	1200	2,5
A320806	A330806	M8	8	11	15	65	40	2200	3,5
A320808	A330808	M10	8	11	15	72	45	3200	6,4
A321010	A331010	M12	9,5	12,5	19	82	50	3600	11

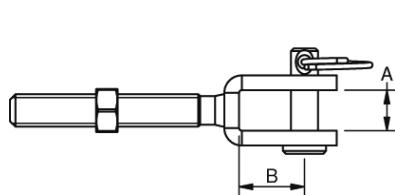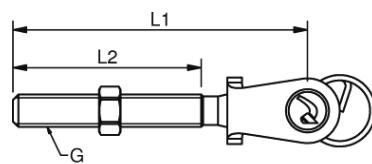

Small welded forks with thread and pin for the small rigging screw bodies, inside thread parts or other terminations. Available with left handed and right handed threads, incl. lock nut.




Small thread eyes for use with the small rigging screws body, inside thread parts or other terminations.

SMALL THREAD EYES

Stainless steel - AISI 316

ART. NO.	G	A	D1	D2	L1	L2	L3	L4	BL/KG	KG/100
A440505	M5	2,5	5,5	9	41	30	11	6	400	0,6
A440506	M6	3,75	5,5	11	48	35	13	7	800	1,3
A440606	M6	3,75	6,5	11	48	35	13	7	800	1,1
A440608	M8	4,5	6,5	15	57	40	16	8,5	1300	2,2

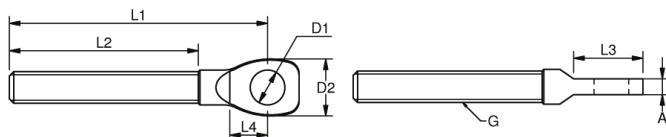


Blue Wave's small thread terminals.



SMALL THREAD TERMINALS

Stainless steel - AISI 316

ART. NO. RIGHT	ART. NO. LEFT	G	WIRE	D1	D2	L1	L2	L3	BL/KG	KG/100
A180503	A190503	M5	3 1/8"	3,5	5,5	60	25	30	360	0,8
A180604	A190604	M6	4 5/32"	4,4	6,35	65	25	35	640	1,2
A180605	A190605	M6	5 3/16"	5,3	7,5	73	30	35	1000	1,7
A180806	A190806	M8	6 -	6,5	9	88	40	40	1400	2,6
A181008	A191008	M10	8 5/16"	8,4	12,58	103	50	45	2300	5,8
A181210	A191210	M12	10 -	10,5	16	118	60	50	3600	10

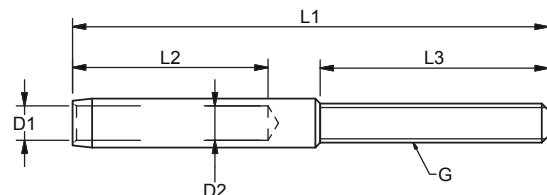


The drop nose is used with the small stainless steel bodies. Also available as terminal for 4 mm and 5 mm wire.

SMALL THREADED DROPNOSE

Polished stainless steel - AISI 316


ART. NO. RIGHT	ART. NO. LEFT	G	D	D2	L1	L2	L3	L4	BL/KG	KG/100	PACK
A3264M6	A3364M6	M6	9	9,5	55	35	25	47	600	1,9	BULK
A3264M8	A3364M8	M8	9	9,5	60	40	25	52	600	2,7	BULK

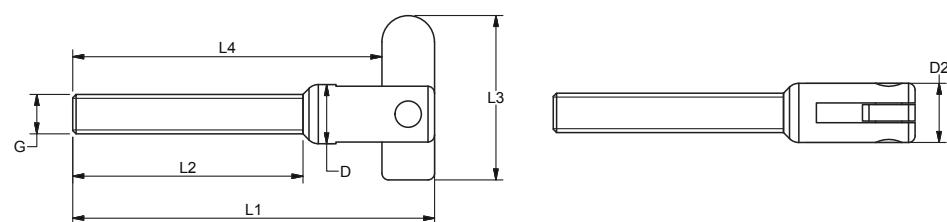

SMALL WELDED INSIDE THREAD FORK

Polished stainless steel - AISI 316

ART. NO. RIGHT	ART. NO. LEFT	G	WIRE	PIN	A	B	D	L1	L2	BL/KG	KG/100
A340503	A350503	M5	3	5	7,5	12	7,1	59	25	800	1,4
A340504	A350504	M6	4	5	7,5	12	8	67	30	1000	1,9
A340605	A350605	M6	5	6	9,5	13	8	68	30	1300	2,2
A340806	A350806	M8	6	8	11	15	11	79	35	2350	4,5

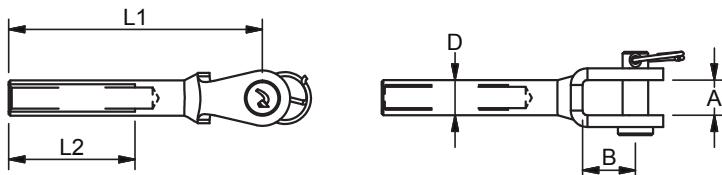


For small architectural wires another good alternative to rigging screw adjustment is the inside thread forks. The forks have a light design as dimensions are reduced to a minimum - the forks are available with left handed and right handed threads as well as in a welded and machined version.

SMALL INSIDE THREAD TERMINAL

Polished stainless steel - AISI 316

ART. NO. RIGHT	ART. NO. LEFT	G	WIRE	D1	D2	D3	L1	L2	L3	L4	BL/KG	KG/100	
A140503	A150503	M5	3	1/8"	7,13	5,5	3,5	65	25	20	35	360	1,2
A140604	A150604	M6	4	5/32"	8	6,35	4,4	65	25	20	35	640	1,7
A140605	A150605	M6	5	3/16"	8	7,5	5,3	70	30	20	30	1000	2,6
A140806	A150806	M8	6	-	11	9,0	6,5	85	40	25	40	1400	6,3

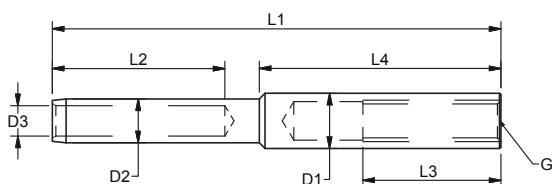



SMALL WELDED FORK TERMINALS

Polished stainless steel - AISI 316



SWAGE
 PRESS
 CRIMP
 SCREW

ART. NO.	WIRE	PIN	A	B	D	L1	L2	BL/KG	KG/100
A360503	3	5	7,5	12	5,5	50	25	360	1
A360504	4	5	7,5	12	6,35	50	25	640	1,5
A360605	5	6	9,5	13	7,5	58	30	1000	2,2
A360806	6	8	11	15	9	72	40	1400	3,7
A360808	8	8	11	15	12,58	85	50	2300	8
A361010	10	9,5	12	19,5	16	106	60	3600	14,1

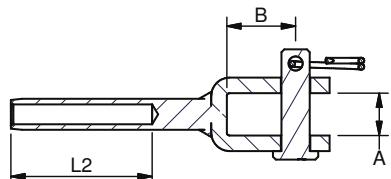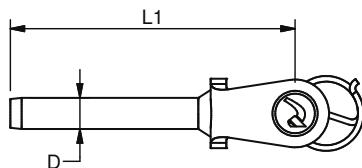

See page 22
for more wire
terminals



SMALL MACHINED FORK TERMINALS

Polished stainless steel - AISI 316



SWAGE
 PRESS
 CRIMP
 SCREW

ART. NO.	WIRE	PIN	A	B	D1	D2	L1	L2	BL/KG	KG/100
A390503	3	5	5,5	12	5,5	11	48	25	360	1,03
A390504	4	5	6,5	15	6,35	13	53	25	640	1,43
A390505	5	5	6,5	15	7,5	13	57	30	1000	2,23
A390606	6	6	8,5	19	9	16	75	40	1400	3,66

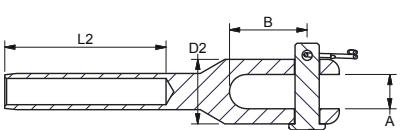
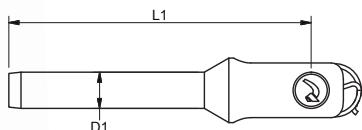


SWAGE
 PRESS
 CRIMP
 SCREW

SMALL EYE TERMINALS

Stainless steel - AISI 316


ART.NO.	WIRE	A	B	D1	D2	L1	L2	L3	L4	KG/100	
A200503	3	1/8"	2,5	9	5,5	5,5	36	25	11	6	0,5
A200504	4	5/32"	3	10	6,35	5,5	38	25	12	6,5	0,7
A200505	5	3/16"	3,75	11	7,5	5,5	43	30	13	7	1
A200606	6	-	4,5	14	9	6,5	61,5	40	16	8	1,9

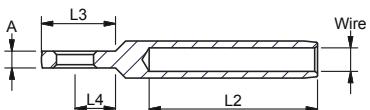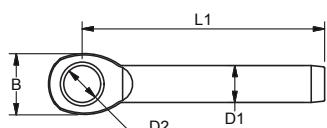

SMALL DOMEHEAD TERMINALS

Polished stainless steel - AISI 316


ART.NO.	WIRE	D1	D2	D3	L1	L2	L3	BL/KG	KG/100
A100003	3	1/8"	5,5	8	3,5	35	25	32	360
A100004	4	5/32"	6,35	10	4,4	35	25	32	640
A100005	5	3/16"	7,5	12	5,3	41	30	37	1000
A100006	6	-	9	14	6,5	52	40	47	1400
									1,9

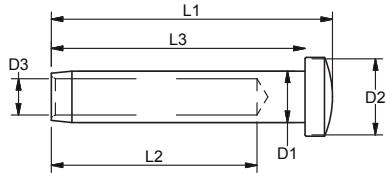

SMALL DROPNOSE TERMINALS

Polished stainless steel - AISI 316

ART. NO	WIRE	D1	D2	D3	L1	L2	L3	L4	BL/KG	KG/100
A64004	4	6,3	4,4	7,6	52	22	32	45	300	1
A64005	5	7,5	5,3	8,4	52	22	32	45	400	1,3

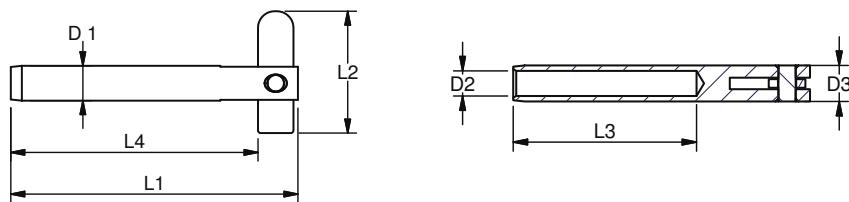


The dropnose terminal is e.g. perfect for tube handrails with vertical wire suspensions. Almost the easiest mounting imaginable - after being attached to the wire, drill a hole and stick through the drop nose end of the terminal and let it drop.
Also available with thread.



SMALL CONE TERMINALS

Polished stainless steel - AISI 316

ART.NO.	WIRE	D1	D2	D3	L1	L2	L3	BL/KG	KG/100
A110003	3	1/8"	3,5	5,5	8	35	25	32,5	360
A110004	4	5/32"	4,4	6,35	10	35	25	32	640
A110005	5	3/16"	5,3	7,5	12	41	30	38	1000
A110006	6	-	6,5	9	14	52	40	48,5	1400
									1,9

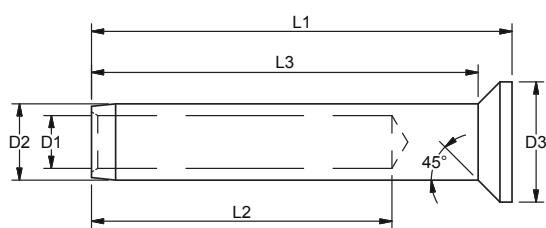

Angle hinge for cone terminals page 56.





The small swageless terminal for soft wire ropes fitted with fork Ø5 mm pin.
No adjustment possible.




SMALL SWAGELESS FORK TERMINAL

Polished stainless steel - AISI 316

ART. NO.	G	WIRE	PIN	A	B	D	KW1	KW2	L1	BL/KG	KG/100	PACK
A840406	M6	4	5	7,5	12,2	11	9	8	77	400	4,6	BULK

Note: 7x19 and 7x7 wire construction only

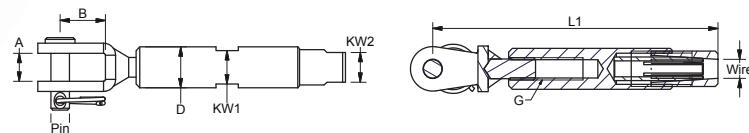

See page
28 for more
swageless
fittings



The small swageless terminal for soft wire ropes with inside thread RH as well as LH.




SMALL SWAGELESS TERMINALS

Polished stainless steel - AISI 316

ART. NO. RIGHT	ART. NO. LEFT	G	WIRE	D	KW1	KW2	L1	L2	BL/KG	KG/100	PACK
A860306	A870306	M6	3	11	8	9	61	25	300	3,1	BULK
A860406	A870406	M6	4	13	9	11	66	25	400	4,7	BULK
A860506	A870506	M6	5	15	10	12	70	25	500	6,5	BULK
A860608	A870608	M8	6	16	12	14	86	30	600	8,8	BULK

Note: 7x19 and 7x7 wire construction only

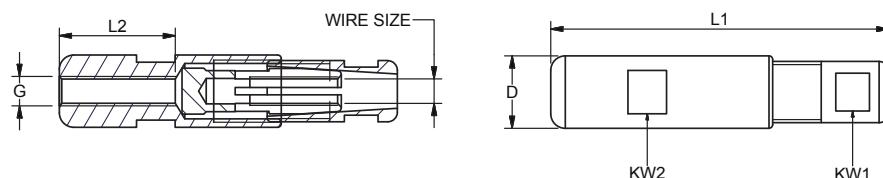

Small swageless terminal for soft wire ropes. Inside thread RH makes various attachments possible.




SMALL SWAGELESS TERMINALS

Polished stainless steel - AISI 316

ART. NO.	G RIGHT	WIRE	D	L1	L2	KW1	KW2	BL/KG	KG/100	
A833205	M5	-	1/8"	11	45	20	9	8	300	2,8
A830406	M6	4	5/32"	11	45	20	9	8	400	2,8

Note: 7x19 and 7x7 wire construction only

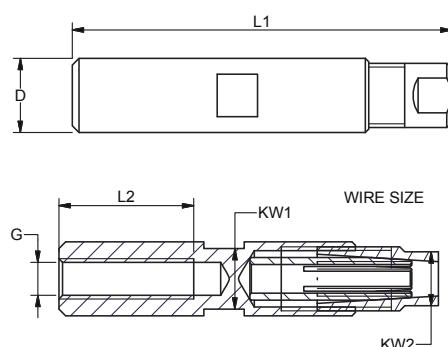

BODIES


See page 33
for small bodies

BODIES

Polished stainless steel - AISI 316

ART. NO.	G	D	L	KW	BL/KG	KG/100
011205	M5	8	80	-	800	1,2
011206	M6	10	92	-	1200	2,6
011208	M8	14	112	-	2200	6
011210	M10	17	120	-	3500	9,4
011212	M12	21	150	-	5100	16
011214	M14	21	170	-	6900	18,4
011216	M16	27	190	-	9400	27,2
011220	M20	34	220	-	14700	46,8
011222	M22	40	270	-	18000	120
011224	M24	42	320	-	21000	147,5
011227	M27	55	345	-	23000	210
011230	M30	55	380	-	28000	309
! 012320	M20	40	240	36	14700	158,2
! 012322	M22	40	270	41	18000	161,6
! 012324	M24	50	325	46	21000	312,6
! 012327	M27	55	345	50	23000	408,1
! 012330	M30	60	375	55	28000	538,4
! 012336	M36	65	410	60	41000	602,8
! 012342	M42	69	440	64	70000	774
! 012348	M48	74	490	68	90000	922,8
! 012352	M52	79	540	72	110000	1141,5
! 012356	M56	85	580	78	101000	1451
! 012360	M60	89	610	80	118000	1615,3

! Body with bronze inserts

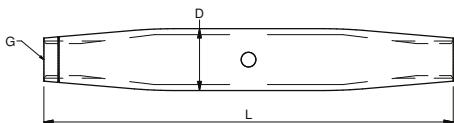


Blue Wave rigging screws bodies feature thread size, "easy use" marking for left and right threaded side and adjustment hole. From M20 upwards the bodies are available with chrome bronze threaded inserts and spanner flat on body for smooth adjustment.

TAMPER PROOF RIGGING SCREW BODY

Polished stainless steel - AISI 316L

ART. NO.	G	PIN	A	B	D1	D2	L1	BL/KG	KG/100	PACK
BST0506	M6	5	5	12	12	15	90	1200	5,8	25

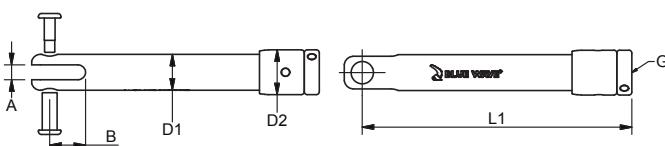


The one sized rigging screw is supplied with special lock nut and tamper proof press pins



TERMINAL FOR TAMPER PROOF RIGGING SCREW

Polished stainless steel - AISI 316L

ART. NO.	G	WIRE	D	L1	L2	L3	BL/KG	KG/100	PACK
900306XL	M6	3 1/8"	6,35	127	75	38	1200	2,7	25
900406XL	M6	4 5/32"	7,5	137	75	45	1200	3,2	25
900506XL	M6	5 3/16"	9	143	75	51	1200	4,1	25

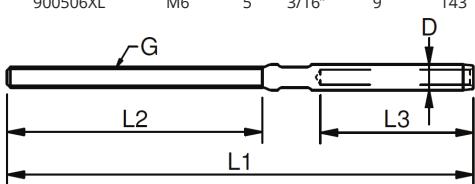

See tamper proof fork on page 23 and replacement pins on page 49



THREADED FITTINGS

See small fittings section on page 33 for small threaded fittings



MACHINED THREAD FORKS



Polished stainless steel - AISI 316

ART. NO. RIGHT	ART. NO. LEFT	G	PIN	A	B	L1	L2	BL/KG	KG/100	PACK
027420B	037420B	M20	19	20	45	219	125	12000	125	BULK
027422B	037422B	M22	22	22	49	216	140	15000	300	BULK
027424B	037424B	M24	25	25	52	255	170	18000	400	BULK
027427B	037427B	M27	28	30	55	274	180	23000	640	BULK
027430B	037430B	M30	32	35	67	316	200	28000	980	BULK
027436B	037436B	M36	35	35	67	334	220	41000	1300	BULK
027442B	037442B	M42	40	34	75	388	250	70000	805	BULK
M02744648B	M03744648B	M48	46	43	106	459	280	70000	1248	BULK
M02745352B	M03745352B	M52	53	46	122	512	310	80000	1755	BULK
M02745356B	M03745356B	M56	53	46	122	528	330	90000	1873	BULK
M02746060B	M03746060B	M60	60	54	132	574	350	115000	2556	BULK

All break loads are determined by clevis pin and thread

Larger machined forks with thread and pin for rigging screws, inside thread parts or other terminations. Available with left handed and right handed threads - also UNF sizes on request.

From M48 and up forks are supplied with countersunk and double headed pins.

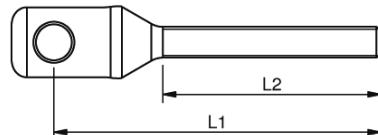
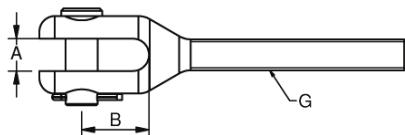


WELDED THREAD FORKS

Polished stainless steel - AISI 316

ART. NO. RIGHT	ART. NO. LEFT	G	PIN	A	B	L1	L2	BL/KG	KG/100	PACK
021205B	031205B	M5	5	7,5	12,2	60	41	800	1,9	10
021206B	031206B	M6	5	7,5	12,2	67	46	1000	2,3	10
021206XB	031206XB	M6	6	9,5	13,7	68	46	1200	2,8	10
021208B	031208B	M8	6	9,5	13,7	79	55	2100	3,9	10
021208XB	031208XB	M8	8	11	16,5	82	55	2200	5,5	10
021210B	031210B	M10	8	11	16,5	90	59	3400	6,9	10
021210XB	031210XB	M10	9,5	12,5	20,2	95	59	3500	7,8	10
021212B	031212B	M12	12	14	25,1	118,8	76	5100	17	5
021212XB	031212XB	M12	14	18	32	125,6	76	5100	26,3	5
021214B	031214B	M14	12	14	25,1	129	86	6400	30,1	5
021216B	031216B	M16	14	18	32	151	98	9400	36,9	5
021216LB	031216LB	M16	14	22	30	149	98	9400	36,9	5
021216XB	031216XB	M16	15,7	17	32,5	150	98	9400	39,4	5
021220B	031220B	M20	19	24	48	191	120	14700	71,9	BULK
021220LB	031220LB	M20	19	28	47	189,5	120	14700	71,9	BULK
021222B	031222B	M22	22	30	57,5	224,5	140	18000	120,1	BULK
021224B	031224B	M24	25,4	30	62	261	170	21000	180	BULK
021227B	031227B	M27	28	32	68	279,8	180	23000	215,1	BULK
021230B	031230B	M30	32	35	76,2	310,8	200	28000	301,9	BULK
021236B	031236B	M36	35	40	86,3	343,7	220	41000	451,7	BULK

All break loads are determined by clevis pin and thread

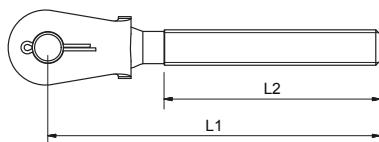
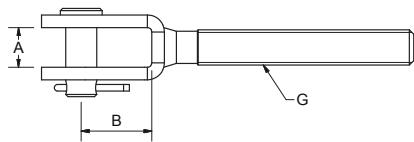


Welded forks with thread and pin for rigging screws, inside thread parts or other terminations. Available with left handed and right handed thread - also UNF sizes on request.

THREADED TOGGLE

Polished stainless steel - AISI 316

ART. NO. RIGHT	ART. NO. LEFT	G	PIN	A	B	C	T	L1	L2	L3	BL/KG	KG/100
023206B	033206B	M6	6	8	17	8	3	88	47	14	1200	5
023208B	033208B	M8	8	10	25	9	3	105	57	18	2200	8,3
023210B	033210B	M10	9,5	12	27	12	4	128	63	22	3500	15,4
023212XB	033212XB	M12	12,7	18	33	18	4	154	80	30	5100	30,5
023214B	033214B	M14	12,7	18	33	18	4	172	90	30	6900	33,3
023216XB	033216XB	M16	16	20	41	20	6	199	100	35	9400	63
023220XB	033220XB	M20	19	24	43	25	8	228	120	40	14700	111

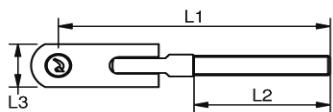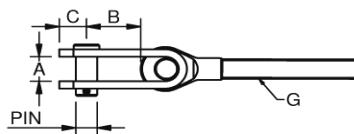

Use the threaded toggles to terminate a rigging screw or other attachment where flexible angles are required or there is a risk of failure due to sideways articulation fatigue e.g. with outdoor canopies etc. Available with left handed and right handed threads - also UNF sizes on request.




Wall toggle with left handed thread and pin for rigging screws, inside thread parts or terminations to flat surfaces.

THREADED WALL TOGGLE

Polished stainless steel - AISI 316

ART. NO. LEFT	G	D1	L1	L2	L3	L4	BL/KG	KG/100
03151406	M6	6,4	81	47	40	14	1200	3,8

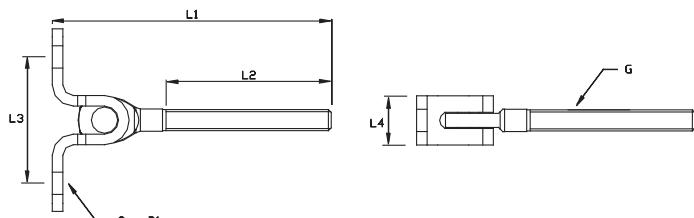


Thread eyes are used in rigging screws, inside thread parts or other similar terminations. Available with left handed and right handed threads - also UNF sizes on request.

THREAD EYES

Polished stainless steel - AISI 316

ART. NO. RIGHT	ART. NO. LEFT	G	A	D1	D2	L1	L2	BL/KG	KG/100	PACK
021905	031905	M5	3	5,5	12	55,5	41	800	0,9	25
021906	031906	M6	4	6,4	14	64,5	47	1200	1,5	25
021908	031908	M8	5	8,5	17	77	57	2000	3,1	25
021910	031910	M10	6	10,5	21	91	63	3000	5,1	25
021912	031912	M12	8	13	25	109	80	4600	10,1	10
021914	031914	M14	9	13	28	123	90	6500	14,1	10
021916	031916	M16	10	14,5	31	133	100	8000	20,4	10
021920	031920	M20	15	19,5	40	164	120	14700	40,6	5
021922X	031922X	M22	18	23	47	196,5	140	18000	69	BULK
021924X	031924X	M24	20	26	53	230	170	21000	105	BULK
021927X	031927X	M27	25	28,5	65	247,5	180	23000	153	BULK
021930X	031930X	M30	30	33	70	274	200	28000	204	BULK
021936X	031936X	M36	30	36	80	295	220	41000	296	BULK

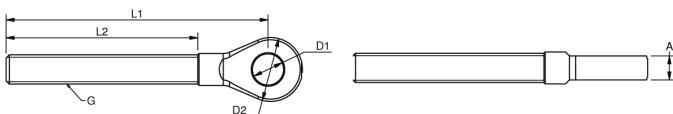


Small thread eyes for use with the small rigging screws body, inside thread parts or other terminations.

THREAD EYE

Stainless steel - AISI 316

ART. NO.	G	A	D1	D2	L1	L2	BL/KG	KG/100
02190898	M8	9	8	18	30	21	2200	1,9

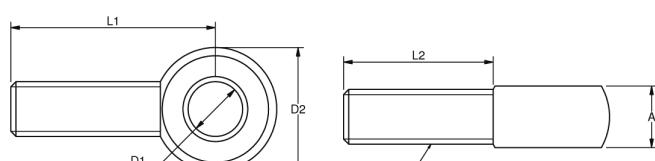

THREAD TERMINALS


Stainless steel - AISI 316


ART. NO. RIGHT	ART. NO. LEFT	G	WIRE	D1	D2	L1	L2	L3	KW	BL/KG	KG/100	PACK
900205	910205	M5	2	2,2	5,5	80	24	42	4,5	800	1,4	BULK
902505	912505	M5	2,5	2,8	5,5	82	27	42	4,5	800	1,5	BULK
900306	910306	M6	3	3,3	6,35	100	38	48	5	1200	2	BULK
900406	910406	M6	4	4,4	7,5	110	45	48	6	1200	2,4	BULK
900408	910408	M8	4	4,4	7,5	117	45	57	6	1700	3	BULK
900508	910508	M8	5	5,3	9	123	51	57	7	2200	4	BULK
900510	910510	M10	5	5,3	9	130	51	63	7	2500	4,5	BULK
900610	910610	M10	6	6,5	12,58	145	64	63	11	3500	8,4	BULK
900612	910612	M12	6	6,5	12,58	162	64	80	11	5100	11	BULK
900712	910712	M12	7	7,5	14,2	170	70	80	12	5100	13,3	BULK
900714	910714	M14	7	7,5	14,2	180	70	89	12	6800	16	BULK
900812	910812	M12	8	8,4	16	185	83	80	14	5100	19,2	BULK
900814	910814	M14	8	8,4	16	194	83	89	14	6900	20	BULK
900816	910816	M16	8	8,4	16	203	83	100	14	8700	23	BULK
901016	911016	M16	10	10,5	17,8	210	89	100	15	9400	35	BULK
901020	911020	M20	10	10,5	17,8	230	89	120	15	9700	35	BULK
901220	911220	M20	12	12,5	20	249	105	120	17	11400	45	BULK
901220X	911220X	M20	12	12,5	21,4	265	120	120	19	14200	50	BULK
901422	911422	M22	14	14,8	25	308	140	140	22	15900	76,8	BULK
901622	911622	M22	16	17	28	333	160	140	25	18200	97,8	BULK
901624	911624	M24	16	17	28	363	160	170	25	19400	111	BULK
901927	911927	M27	19	20	34,5	425	200	180	30	23000	209,0	BULK
902027	912027	M27	20	21	34,5	425	200	180	30	23000	206,1	BULK
902230	912230	M30	22	23,5	40,5	480	230	200	36	28000	314	BULK
902636	912636	M36	26	27,5	46	550	280	220	41	41000	470	BULK
M902848	M912848	M48	28	29,5	50	630	295	280	44	70000	781	BULK
M903052	M913052	M52	30	31,5	58	688	315	310	50	80000	1115	BULK
M903256	M913256	M56	32	33,5	58	730	335	330	50	90000	1239	BULK
M903660	M913660	M60	36	37,5	65	793	375	350	57	115000	1618	BULK

Note: Further sizes available on request



The wide range of threaded Blue Wave terminals are engraved with wire size and swage depth thereby making them easy to use when pressing or swaging them onto the wire. The terminals are available with left handed or right handed threads and also with split pin hole or UNF thread on request. Threaded terminals are used to put tension on a wire either with the help of nuts and washers or as part of a rigging screw.

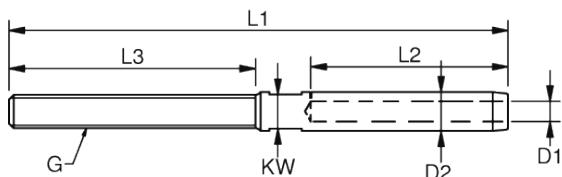

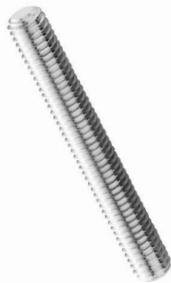


The threaded pins are a useful way to solve a problem where the wire may need to be lengthened. Connect it to an inside thread wall anchor and use an inside thread terminal or rigging screw body for tensioning.

THREAD PIN

Polished stainless steel - AISI 316


ART. NO.	G	L	KG/100
A400503	M5	38	1
A830570	M5	70	0,8
A400604	M6	45	1
A830670	M6	70	1,2
A400806	M8	52	2

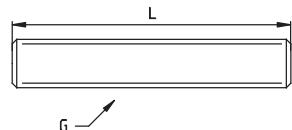

DOUBLE THREADED PIN

Polished stainless steel - AISI 316

ART. NO.	G	L	L1	KW	KG/100	PACK
A392405	M5	60	24	3	0,7	BULK
900305HV	M5	70	30	3	0,95	BULK
A392706	M6	66	27	4	1,2	BULK
900406HV	M6	106	48	4,5	1,91	BULK
A393008	M8	75	30	6	2,3	BULK
900408HV	M8	129	57	6	4,13	BULK
900610HV	M10	145	63	7	7,11	BULK
900712HV	M12	180	80	9	12,96	BULK
900814HV	M14	198	89	11	19,6	BULK

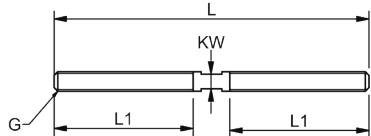

The opposite rigging screw would be a combination of the double threaded pin and inside threaded terminals locked at either side. This is usually used where extra adjustment lengths are needed or when pre-fitted wires are manufactured too short.




COPYRIGHT "THE NOMAD CONCEPT"
WWW.NOMADCONCEPT.COM

INSIDE THREAD DOMEHEAD

Polished stainless steel - AISI 316

ART. NO.	G	D1	D2	L1	L2	L3	BL/KG	KG/100
A170503	M5	7,13	10	43	40	25	800	0,5
A170604	M6	8	11,5	49	45	30	1300	0,7
A170806	M8	11	14	60	55	35	2350	1,0

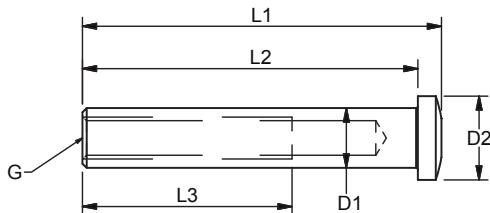


The inside thread domehead is, when combined with a threaded terminal, an ideal end/adjustment fitting for balustrades with through going holes. For 4 mm wire it can also be combined with a ball for dome head terminal, for diagonal or angle tensioning. The domehead features an Allen key hole and minimum overall dimensions.

INSIDE THREAD TERMINALS

Polished stainless steel - AISI 316

ART. NO.	G	WIRE	D1	D2	D3	L1	L2	L3	L4	BL/KG	KG/100	PACK
982504	M4	2,5	2,8	5,5	5,5	59	27	15	25	500	0,8	BULK
980305	M5	3	3,3	6,35	7,13	77	38	20	27	800	1,3	BULK
980305L	M5	3	3,3	6,35	7,13	92	38	35	42	800	1,6	BULK
980406	M6	4	4,4	7,5	8	83,5	45	20	27	1250	1,8	BULK
980406L	M6	4	4,4	7,5	8	98,5	45	35	43	1250	2,1	BULK
980506	M6	5	5,3	9	9	90	51	20	30	1250	2,8	BULK
980506L	M6	5	5,3	9	9	105	51	35	45	1250	3,2	BULK
980508	M8	5	5,3	9	12,58	112	51	40	47	2350	5,4	BULK
980608	M8	6	6,5	12,58	12,58	109,5	64	25	33,5	2350	7,2	BULK
980608L	M8	6	6,5	12,58	12,58	125,5	64	40	47	2350	8,2	BULK
980610	M10	6	6,5	12,6	16	126,5	64	40	50	3500	10,5	BULK
980810	M10	8	8,4	16	16	140	83	40	47	3500	15,4	BULK
980812	M12	8	8,4	16	17,8	147	83	40	48	5100	16,7	BULK
981012	M12	10	10,5	17,8	17,8	150	89	40	47	5100	19,4	BULK
981016	M16	10	10,5	17,8	22	152	89	40	45	8000	20,7	BULK

Left thread available on request

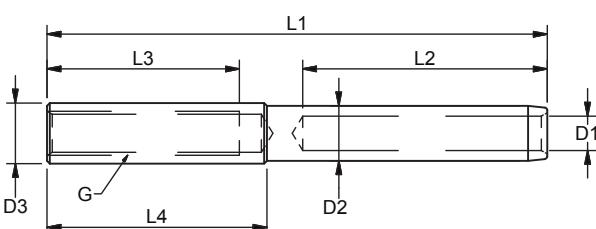

Often found to be a good alternative to a standard rigging screw. The terminals are available with right handed threads and left handed on request. For ease of use when pressing or swaging onto the wire, the terminals are marked with wire size and swage depth.






The dual thread pin allows direct installation into wood and if combined with the correct raw plug it is attachable to almost any wall. Ideal for inside thread solutions.

DUAL THREAD SCREW

Polished stainless steel - AISI 316

ART. NO. RIGHT	ART. NO. LEFT	G	D	L1	L2	L3	KG/100
A410503	A420503	M5	5	70	25	40	0,78
A410604	A420604	M6	6	80	35	40	1,32
A410806	A420806	M8	8	86	40	40	2,55

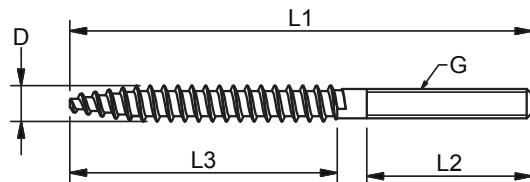


See dual thread screw tong on page 74

THREAD INSERT SCREW

Polished stainless steel - AISI 316



ART. NO. RIGHT	ART. NO. LEFT	G	L	D1	D2	KW	KG/100
A410520	A420520	5	20	11	8,5	5	0,6
A410624	A420624	6	24	12	9,5	6	1,1
A410828	A420828	8	28	14	11,5	8	1,6
A411030	A421030	10	30	17,5	14,5	10	2,8

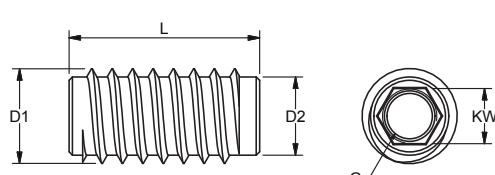

Thread insert screw with inside thread left and right for anchoring into wood. Allows for "hidden" adjustment of M5 - M8 threaded parts.

Inside allen key.


Use with thread terminal and nut.

SCREW EYES

Polished stainless steel - AISI 316



ART. NO.	A	D1	D2	L1	L2	L3	KG/100
A433553	3	5,3	5	57	40	12	0,7
A434063	3,8	6,3	6	58	40	13	1

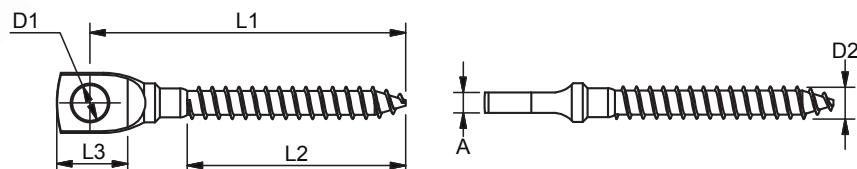

The screw eyes can be directly installed in wood and if combined with the correct raw plug can be attached to almost any wall. Use it as a small eyebolt for attachment to forks, toggle forks, shackles etc.

SPARES FOR RIGGING SCREWS


LOCK NUT

Polished stainless steel - AISI 316

ART. NO. RIGHT	ART. NO. LEFT	G	H	KW	KG/100	PACK
041205	051205	M5	4	8	0,1	BULK
041206	051206	M6	4	8	0,1	BULK
041208	051208	M8	5	10	0,15	BULK
041210	051210	M10	6,5	13	0,25	BULK
041212	051212	M12	8	17	0,7	BULK
041214	051214	M14	9,5	19	1,3	BULK
041216	051216	M16	11	22	2	BULK
041220	051220	M20	13	24	2,25	BULK
041222	051222	M22	16,5	30	3,5	BULK
041224	051224	M24	17,5	36	8,8	BULK
041227	051227	M27	22	41	16	BULK
041230	051230	M30	24	46	17	BULK
041236	051236	M36	29	55	39	BULK
041248	051248	M48	38	70	79,9	BULK
041252	051252	M52	42	75	98,8	BULK
041256	051256	M56	45	85	143,7	BULK



Nuts may be used for locking e.g. a rigging screw and they are very useful to tighten a thread terminal to tension a wire.

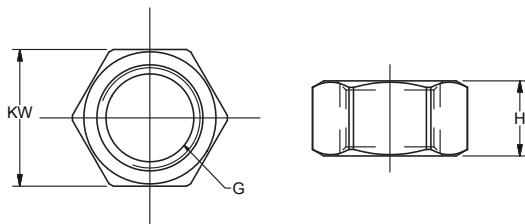


TOP NUT

Polished stainless steel - AISI 314

ART.NO.	G	KW	KG/100
A040503	M5	8	0,2
A040604	M6	10	0,4
A040806	M8	13	0,9



The top nut locks and covers up the thread end.

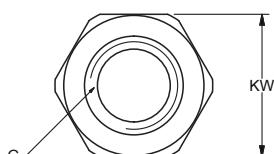


SECURITY NUT

Polished stainless steel - AISI 316

ART. NO.	G	D	L	KW	KG/100	BREAK	PACK
044310	M10	17	9	17	1,3	50Nm	BULK
044312	M12	20	10,5	22	2,3	50Nm	BULK



The security nut is the ideal solution where the nut has to remain permanently tightened. Once tightened, the KEY part breaks off and only a cone is left.

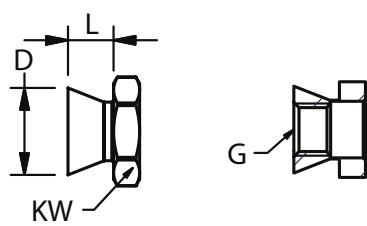




STOP END NUTS

Polished stainless steel - AISI 316


ART. NO.	G	D1	D2	L1	L2	BL/KG	KG/100
A160503	M5	8	12	33	30	800	0,8
A160604	M6	8	12	39	35	1300	0,85
A160806	M8	10	14	45	40	2350	1,2
A161008	M10	13	17	50	45	3500	2,5

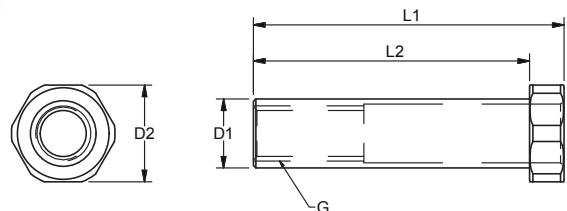

CLEVIS PINS

Polished stainless steel - AISI 316


ART. NO.	D1	D2	L	KG/100
061304	4	2,2	13	0,2
060805	5	2,2	8	0,2
061605	5	2,5	15	0,3
061806	6	2,5	17	0,9
061663	6,35	2,5	16	0,9
061908	8	3	18	1
062008	8	2,5	21	1,1
062395	9,5	3	23	1,5
061910	10	3,5	19	1,7
062611	11	3,5	26	2,4
062812	12	4	28	3
063012	12	4	30	3,5
063412	12	4	34	4
063214	14	4	33	5,3
063714	14	4	38	5,5
063416	15,7	3,5	34	6,5
064016	16	3,5	40	7,7
064419	19	3,5	45	13
064919	19	3,5	49	14
064622	22	5,5	46	16,3
065522	22	5,5	55	19
065822	22	5,5	58	20
065525	25,4	5,5	56	25
066325	25	5,5	63	28
067328	27,7	5,5	73	40
068332	32	6,5	83,5	60
068835	34,8	6,5	88,5	76

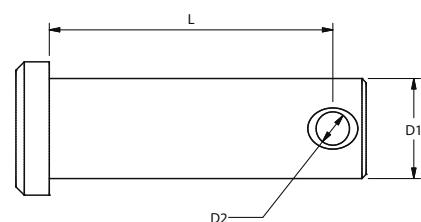

PRESS PINS

Polished stainless steel - AISI 316L

ART. NO.	D	L	KG/100
061505P	5	15	0,4
061706P	6	17	0,5
062008P	8	20	1
062210P	10	22	1,7




The press pin is a tamper proof alternative to the standard clevis pins. Fits the Blue Wave welded forks.

DOUBLE HEADED PINS

Polished stainless steel - AISI 316

ART. NO.	D	L	KG/100
061606H	6	16,2	1
062008H	8	19,5	1,5
062110H	9,8	21,2	2,4



Elegant and tamper proof alternative to standard clevis pins. Fits the Blue Wave welded forks.


SPLIT PINS

Stainless steel - AISI 316

ART. NO.	DIM	L	KG/100	PACK
070609	1,5	10	0,01	100
0706101	2	12	0,03	100
070610	2	15	0,03	100
070611	2	25	0,05	100
0706121	2,5	16	0,06	100
070612	2,5	25	0,1	100
0706131	3,2	20	0,14	50
070613	3	25	0,15	50
070614	3	32	0,2	50
0706151	4	32	0,35	BULK
070617	5	40	0,75	BULK
070618	6,3	50	1,3	BULK

BLUE WAVE STANDARD SPLIT HOLES


Thread	Split hole	
	Size	\varnothing
-	-	-
1/4"	2,2	
1/4"	2,2	
1/4"	2,2	
5/16" + 3/8"	2,8	
5/16" + 3/8"	2,8	
7/16" + 1/2"	3,5	
7/16" + 1/2"	3,5	
7/16" + 1/2"	3,5	
5/8" + 3/4"	4,5	
7/8" + 1"	5,5	
-	-	-



G RINGS

Stainless steel - AISI 316

ART.NO.	DIM.	D	KG/100	PACK
070601	1	11	0,015	100
070602	1,25	15	0,075	100
070603	1,5	19	0,1	100
070604	2	23	0,23	100



ACCESSORIES




TOGGLS

Polished stainless steel - AISI 316

ART. NO.	PIN	A	B	C	BL/KG	KG/100	PACK
140006	6	7,5	28	6,5	1800	2,3	10
140008	8	8,5	34	7,5	2600	4	10
140010	9,5	10,5	45	9,5	4000	5,9	10
140011	11	11,5	50	10,5	4800	8,5	10
140012	12	13,5	56	12	5800	12,4	10
140016	16	17	63	15	8000	22,5	BULK
140019	19	21	69	18	13000	40,7	BULK
140022	22	25	111	25	17000	80,2	BULK
140025	25,4	30	104	25	29000	105	BULK
140028	28	32	121	30	36000	147	BULK
140032	32	38	133	33	48000	225	BULK

Note: All break loads are determined by clevis pin

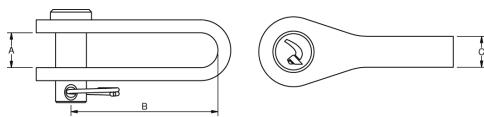

For lengthening the wire or adding flexibility to installations, the toggles can be applied. Where a structure is subjected to stress the use of a toggle is essential as it can minimise the fatigue risk.




TOGGLS WITH EYE

Polished stainless steel - AISI 316

ART. NO.	PIN	T	A	B	D	L1	L2	BL/KG	KG/100	PACK
140506	5	5	7,5	12	5,5	26	9	1300	1,8	25
140608	6	6	9,5	13	6,5	32	10	1800	3	10
140810	8	8	11	15	8,5	36	12	3200	5,5	10
141011	9,5	9	12,5	19	10	45	16	3500	7,2	10
141111	11	9	12	23	11,5	51	17	5200	12,1	10
141214	12	10	14	25	13	59	23	5900	14,5	10
141414	14	14	22	30	14,5	78	28	7500	28	10
141616	16	16	22	30	16,5	84	30	9400	47,7	10

Note: All break loads are determined by clevis pin

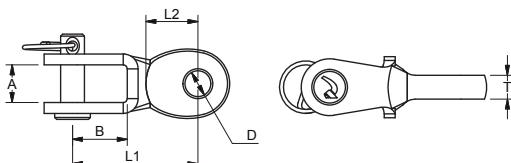


SECURITY U BOLTS

Polished stainless steel - AISI 316 - Wst. 1.4401

ART. NO.	G	Ø	A	D	L1	L2	L3	L4	BL/KG	KG/100	PACK	BREAK NUT
Class 3 certified												
431265	M12	32	46	14	122	65	41	48	5100	31	1	50 Nm
Class 2 certified												
431045	M10	28	40	12	95	45	38	40	3500	22	1	50 Nm

Note: All break loads are determined by thread

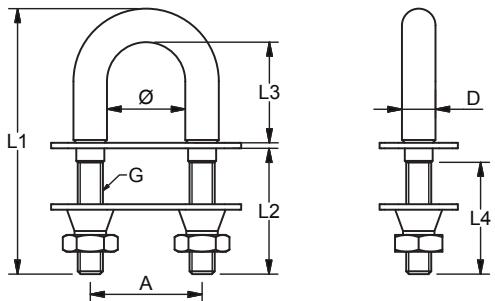

Swedish certified security and antitheft U bolt.


The hard chromed surface makes cutting attempts extremely hard and the conical security lock nut can't be removed once mounted.

U BOLTS

Polished stainless steel - AISI 316

ART. NO.	G	A	D	L1	L2	L3	L4	BL/KG	KG/100	PACK
340435	M4	30	4	66	35	25	30	750	2,1	25
340535	M5	30	4,4	67	35	25	30	900	2,6	25
340635	M6	33	5,3	67	35	26	30	1250	4,5	5
340650	M6	33	5,3	84	50	26	30	1250	5,7	5
340835	M8	33	7,1	71	35	26	30	1750	7,2	5
340850	M8	33	7,1	86	50	26	30	1750	9,7	5
340880	M8	33	7,1	116	80	26	45	1750	11,8	5
348840	M8	50	8	80	40	30	32	1750	12,4	5
348850	M8	50	8	90	50	30	32	1750	13,2	5
341045	M10	40	10	95	45	40	40	3500	18,4	5
341060	M10	40	10	110	60	40	35	3500	20,4	5
341010	M10	40	10	150	100	40	85	3500	25	5
341280	M12	47	10,8	122	80	30	85	5100	29	5

Note: All break loads are determined by thread. Use of thread lubricant is recommended.

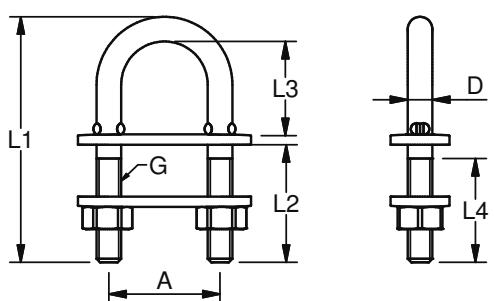




The welded eye bolts are supplied with a pre-welded cover disc, washer and nut and offer a strong attachment.

WELDED EYE BOLTS

Polished stainless steel - AISI 316

ART. NO.	G	T	D1	D2	L1	L2	L3	L4	BL/KG	KG/100	PACK
370630	M6	5,3	13,5	25	56,5	46	32	31	1200	1,8	10
370640	M6	5,3	13,5	25	66,5	56	41	41	1200	2,8	10
370650	M6	5,3	13,5	25	75,5	65	50	50	1200	3	10
370660	M6	5,3	13,5	25	86,5	76	60	60	1200	2,6	10
370600	M6	5,3	13,5	25	125,5	115	100	95	1200	3,7	10
370835	M8	6,5	15,5	25	66	53,5	35	35	2200	3,8	10
370850	M8	6,5	15,5	25	81	68,5	50	50	2200	4,9	10
370880	M8	6,5	15,5	25	111	98,5	80	76	2200	5,5	10
370800	M8	6,5	15,5	25	130	117,5	100	75	2200	6,5	10
371050	M10	7,7	16	30	86	71,5	50	50	3500	8,7	10
371000	M10	7,7	16	30	136	121,5	100	95	3500	11	10
371250	M12	8,8	19	30	90,5	73,5	50	50	4500	10,2	10
371210	M12	8,8	19	30	140,5	123,5	100	85	4500	15	10
371216	M12	8,8	19	30	200,5	184	163	85	4500	19	10

Note: All break loads are determined by eye (D) and thread

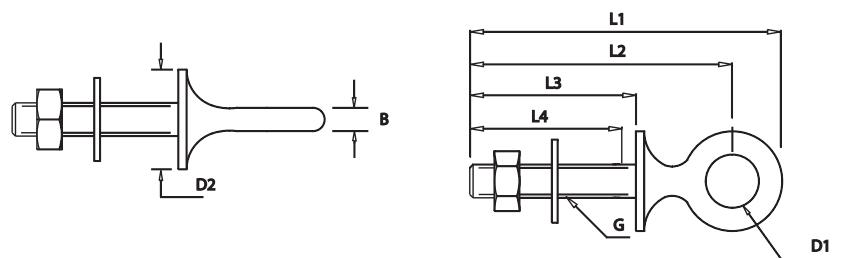


The forged eye bolts are supplied with a pre-welded cover disc, washer and nut and offer a strong attachment.

FORGED EYE BOLTS

Polished stainless steel - AISI 316

ART. NO.	G	B	D1	D2	L1	L2	L3	L4	BL/KG	KG/100	PACK
310630	M6	4	6,5	25	53	46	30	30	1200	1,3	10
310660	M6	4	6,5	25	83	76	60	60	1200	2,1	10
310835	M8	5	8,5	25	65	58	35	35	2200	3,3	10
310880	M8	5	8,5	25	110	104	80	75	2200	5	10
311050	M10	6	10,5	30	87	75	50	50	3500	8,2	10
311000	M10	6	10,5	30	137	125	100	85	3500	11	10


Note: All break loads are determined by eye (D1) and thread

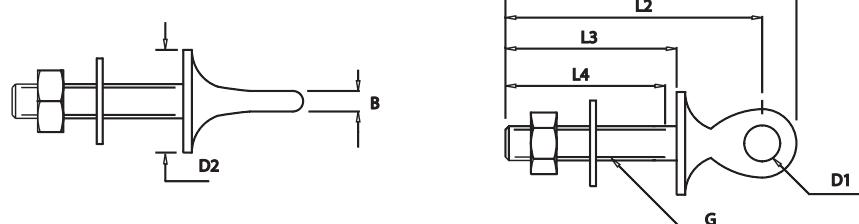

EYE STRAPS

Polished stainless steel - AISI 316

ART. NO.	H	A1	A2	D1	D2	KG/100	PACK
150401	12	28	11	4,2	9	0,3	100
155102	13	34	15	5,2	11	0,5	100
155203	19	44	20	5,2	12	1	100
155304	24	64	28	5,2	10	1,2	50
156205	29	69	32	6,4	14	2	50

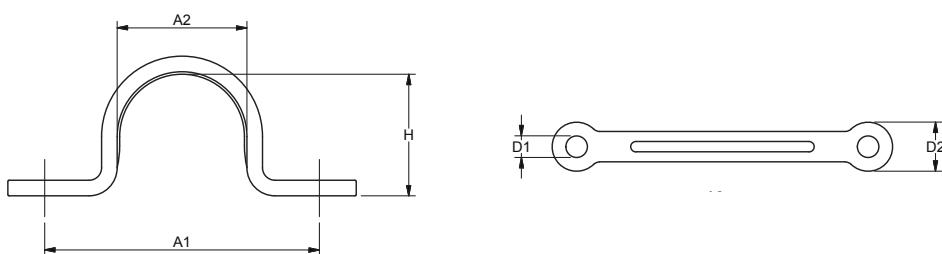


Eye straps are used for various attachments and fixing points. Place it over two pre-drilled holes and if possible use a pop rivet for easy attachment.

STRAP EYE

Polished stainless steel - AISI 316

ART. NO.	D1	D2	D3	L1	L2	L3	BL/KG	KG/100	PACK
150404	4,2	9	7	15	4,7	1,5	500	0,3	100
150505	5	11	10	24	7,3	2	1000	0,8	100

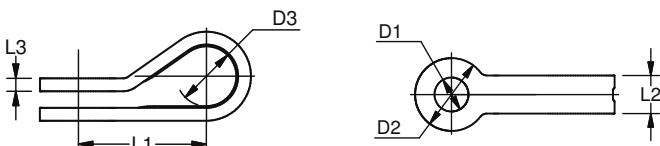


The strap eye is the one hole version of the eye strap. Used with a pop rivet e.g. for cabling.

COVER DISC

Polished stainless steel - AISI 316

ART. NO.	D1	D2	D3	KG/100
A500003	15	5,5	3	0,35
A500004	20	6,5	4	0,85
A500006	25	8,5	4	1,3

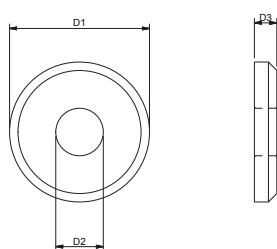

The final touch to an installation may be given by use of a cover disk. The WDS cover disk is "heavy" machined and has a raised edge.


The flat shackles have been produced by Blue Wave for more than half a century. A high quality product stamped from AISI 316L plate material with high break loads. Available in various versions and flexible in use with the remaining range of products or as attachment to an existing construction.



SHACKLES

Polished stainless steel - AISI 316

ART. NO.	A	D	L	BL/KG	KG/100	PACK
160041	10	M4	15	500	0,5	100
160051	12	M5	17	1000	1	100
160052	16	M5	24	1000	1,6	100
160053	16	M5	36	1100	1,8	100
165251	13,5	M5	25	1100	1,5	100
165206	16	M6	23	1400	1,6	50




Note: All break loads are determined by pin and thread



SHACKLES

Polished stainless steel - AISI 316

ART. NO.	A	D	L	BL/KG	KG/100	PACK
150041	10	M4	15	500	0,5	100
150051	12	M5	17	1000	1,6	100
150052	16	M5	24	1000	1,6	100
150053	16	M5	36	1100	1,8	100
155251	13,5	M5	25	1100	1,5	100
155206	16	M6	23	1400	1,6	50
150062	14	M6	40	2000	2,9	50
150082	18	M8	42	3000	5	50




Note: All break loads are determined by pin and thread



SHACKLES

Polished stainless steel - AISI 316

ART. NO.	A	D	L	BL/KG	KG/100	PACK
150061	14	M6	23	2000	2,5	50
150081	17	M8	31	3000	4,5	50
150010	21	M10	40	4800	8,5	25
150012	25	M12	50	7000	16	25




Note: All break loads are determined by pin and thread



SHACKLES

Polished stainless steel - AISI 316

ART. NO.	A	D	L	BL/KG	KG/100	PACK
151010	21	M10	40	4800	9	25
151212	25	M12	50	7000	16,5	25




Note: All break loads are determined by pin and thread

THIMBLES

Polished stainless steel - AISI 316

ART. NO.	A	A1	B	L	S	KG/100	PACK
110002	3	5,25	9	16	1	0,2	100,0
110003	4	6,25	10	17	1	0,3	100,0
110004	5	7,5	11	19	1,35	0,5	100,0
110005	6	8,5	13	21	1,2	0,7	100,0
110006	7	9,7	15	27	1,5	1,1	100,0
110007	8	11	19	33	1,5	1,4	100,0
110008	9	13,5	22	38	2	2,6	50,0
110009	10	13,75	24	43	2	3,1	50,0
110010	11	15,3	27	46	2,7	4,9	BULK
110012	14	18,3	29	52	2,7	6,6	BULK
110014	16	21	33	57	3	9	BULK
110016	18	23	40	67	3	11,3	BULK
110018	20	26,5	45	75	4	19	BULK
110020	22	30,5	52	84	4	31,2	BULK
110022	24	32	56	93	5	45,5	BULK
110026	28	37,5	65	112	6	67	BULK
110028	30	40	80	135	5,5	82	BULK
110032	34	43	92	160	6,25	110	BULK
110034	36	46,5	105	160	6	117	BULK
110036	38	49	115	176	6	142	BULK
110038	40	53,5	120	180	8	206	BULK
110040	42	55	120	192	8	220	BULK
110042	45	56,5	150	240	8	304	BULK

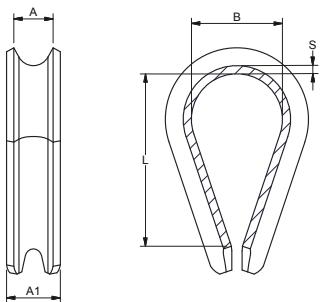


The thimbles from Blue Wave are known worldwide for supreme quality and are often the first choice for the harsh environment of the marine sector.

WELDED THIMBLES

Polished stainless steel - AISI 316

ART. NO.	Ø	A	A1	B	L	S	KG/100	PACK
119908	6	9	13,5	22	22	2	2,9	25
119909	6	10	13,75	24	24	2	3,2	25
119910	8	11	15,3	27	27	3	5,9	25
119912	8	14	18,3	29	29	3	6,3	25
119914	10	16	21	32	32	3	12,3	10
119916	10	18	23	40	40	3	13,6	10
119918	12	20	26,5	45	45	4	24	10
119920	12	22	30,5	50	50	4	34,8	10
119922	16	24	32	56	56	5	51,8	BULK
119926	16	28	37,5	60	60	6	85,6	BULK

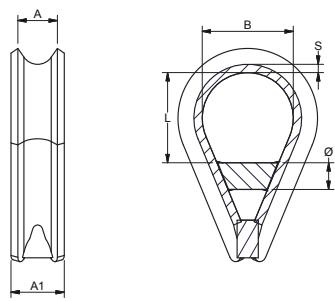

The reinforced thimble is based on the standard thimble but extra force is attained by the addition of a welded bar, as well as the ends of the thimbles being welded together.

Other sizes
on request





The angle hinges are used for standard threaded or cone terminals and give a nice final attachment to diagonal wire installations or on staircases, for example.



ANGLE HINGE

Polished stainless steel - AISI 316

ART. NO.	α	L	D1	D2	KG/100	PACK
A302003	20	5	11	5	0,4	10
A302503	25	5	11	5	0,4	10
A303003	30	5	11	5	0,5	10
A303503	35	5	11	5	0,6	10
A304003	40	5	11	5	0,6	10
A302004	20	5	13	6	0,6	10
A302504	25	5	13	6	0,7	10
A303004	30	5	13	6	0,8	10
A303504	35	5	13	6	0,8	10
A304004	40	5	13	6	0,9	10
A302006	20	5	17	8,2	1,2	10
A302506	25	5	17	8,2	1,2	10
A303006	30	5	17	8,2	1,3	10
A303506	35	5	17	8,2	1,5	10
A304006	40	5	17	8,2	1,6	10





ANGLE HINGE FOR CONE TERMINALS

Polished stainless steel - AISI 316




ART. NO.	α	L	D1	D2	D3	L1	KG/100	PACK
A312003	20	5	11	6	8,3	1	0,4	10
A312503	25	5	11	6	8,3	1	0,4	10
A313003	30	5	11	6	8,3	1	0,5	10
A313503	35	5	11	6	8,3	1	0,6	10
A314003	40	5	11	6	8,3	1	0,6	10
A312004	20	5	13	7	10,3	1	0,6	10
A312504	25	5	13	7	10,3	1	0,7	10
A313004	30	5	13	7	10	1	0,8	10
A313504	35	5	13	7	10	1	0,8	10
A314004	40	5	13	7	10	1	0,9	10
A312005	20	5	14	8	12	1	0,8	10
A312505	25	5	14	8	12	1	0,9	10
A313005	30	5	14	8	12	1	0,9	10
A313505	35	5	14	8	12	1	1	10
A314005	40	5	14	8	12	1	1,1	10
A312006	20	5	17	10	15	1	1,2	10
A312506	25	5	17	10	15	1	1,2	10
A313006	30	5	17	10	15	1	1,3	10
A313506	35	5	17	10	15	1	1,5	10
A314006	40	5	17	10	15	1	1,6	10



WDS BALL

Polished stainless steel - AISI 316

ART. NO.	G	WIRE	G	D	L
A240503	M5	3	M5	15	12
A240503X	M5	3	M5	20	16
A240605	M6	4 - 5	M6	20	16
A240806	M8	6	M8	25	20

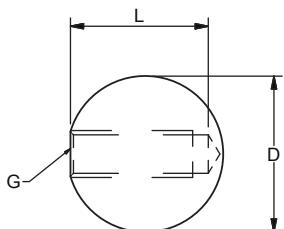


The range of WDS balls are used as stop ends to various wire fittings.
Also ideally suited for angled installation of wires.

BALL FOR DOMEHEAD SCREW


Polished stainless steel - AISI 316

ART. NO.	G	D	D1	KG/100
A270503	M5	15	5,3	1,2
A270604	M6	20	6,3	2,9
A270806	M8	25	8,5	5,7
A271008	M10	30	10,5	8,8

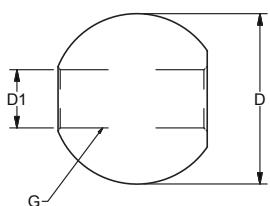**BALL FOR DOMEHEAD TERMINAL**

Polished stainless steel - AISI 316

ART. NO.	WIRE	B	D	D1	D2	KG/100
A280003	3	2,3	15	6	8,5	2,2
A280004	4	2	20	7	10,5	2,9
A280005	5	2,7	20	8	12,0	5,7
A280006	6	3,5	25	9,5	14,5	5,7






NET CLIPS

Polished stainless steel - AISI 316

ART. NO.	G	WIRE	D1	L	L1	L2	L3	KG/100
A600003C	M10	3	17	19	5	8	3,2	2,4
A600004C	M12	4	20	21	5	8	4,2	3,6
A600005C	M12	5	20	23	5	10	5,2	3,6
A600006C	M12	6	20	25	5	10	6,2	5,8
A600008C	M16	8	26	32	8	15	8,3	7,7

Net clips are used where crossed wires need connection e.g. for wire nets. They are supplied in two versions - one with through-going thread and one without.

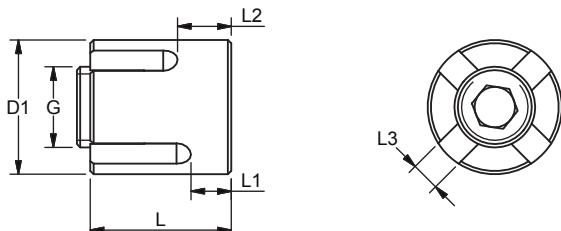

For through - going thread please order

ART. NO.	G	WIRE	D1	L	L1	L2	L3	KG/100
A610003C	M10	3	17	19	5	8	3,2	2,4
A610004C	M12	4	20	21	5	8	4,2	3,6
A610005C	M12	5	20	23	5	10	5,2	3,6
A610006C	M12	6	20	25	5	10	6,2	5,8
A610008C	M16	8	26	32	8	15	8,3	7,7





FLEXIBLE NET CLIP

Polished stainless steel - AISI 316

ART.NO.	G	Ø	D	L	ROTATION	KG/100
A602403	M12	3	20	17,5	0-90 Dg.	31
A602404	M12	4	20	19,5	0-90 Dg.	32
A602405	M12	5	20	21,5	0-90 Dg.	32
A602406	M12	6	20	23,5	0-90 Dg.	34

With the flexible net clip two crossing wires can be fixed in angle from 0-90 degrees.

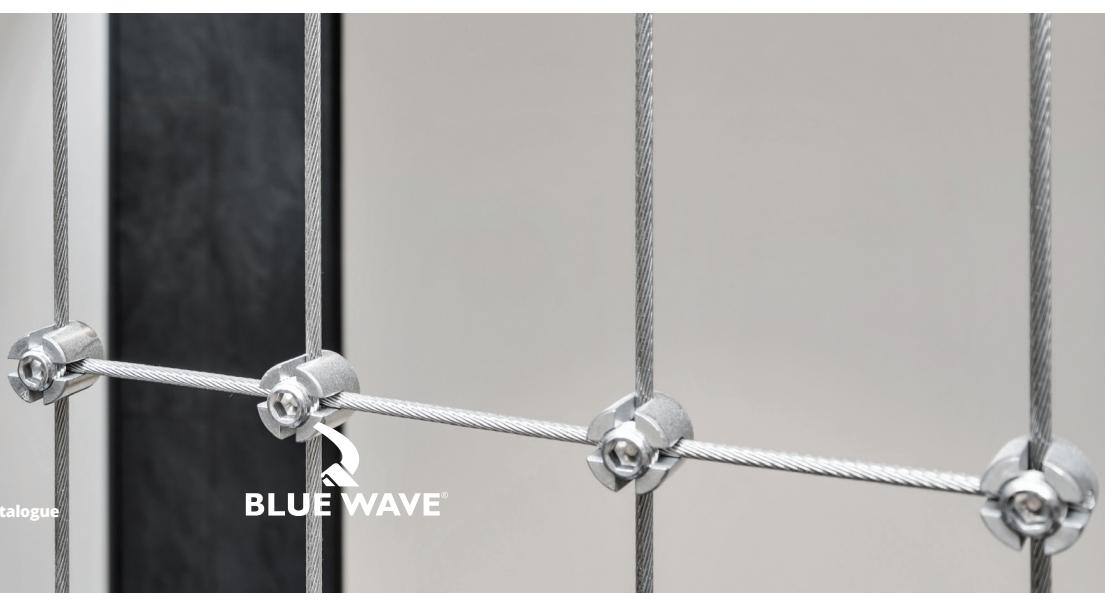


WIRE ROPE CLIPS

Stainless steel - AISI 316

ART. NO.	G	WIRE	A	L1	L2	L3	L4	GRIPS PER LOOP	KG/100
A580303	M3	3	7	19	10	17,7	11	3	1
A580404	M4	4	9	21	10,7	21	12,7	3	1,5
A580505	M5	5	12	28	13	25	14	4	2,6
A580606	M6	6	16	32	15,5	28	15,8	4	3,6
A580808	M6	8	16	36	16,5	36	18,5	4	4,8

Note: Only for wire ropes

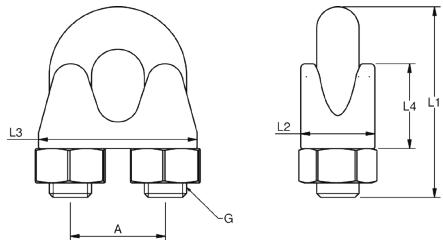


Clamps are used for making wire loops with or without thimbles on site.



BALUSTRADE WIRE RELIEF

Nylon

ART. NO.	D1	D2	D3	L1	L2	HOLE SIZE	KG/100	PACK
A6504	4,2	13	9,2	11,2	8	9	0,1	100
A6505	5,7	14	10,2	13,1	10	10	0,13	100
A6506	6,4	14	10,2	13,1	10	10	0,12	100
A6508	8,4	15,6	13,2	13,1	10	13	0,14	100

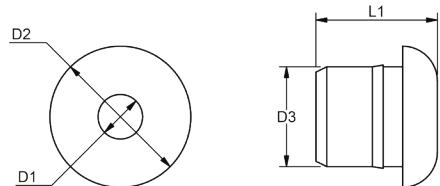

**Black split
bushing
for push or
glue in**



The wire reliefs are used to avoid direct contact between wire and balustrade. Reduces wear and tear and will avoid galvanic corrosion, for example.






Stoppers are used on both horizontal and vertical wires. They come in two parts for easy installation and have small teeth inside and thus a better grip when load is applied.

STOPPER

Polished stainless steel - AISI 316

ART. NO.	G	WIRE	B	L	L1	L2	SLIP LOAD	KG/100
A650003	M3	3	10	15	3	2,5	100kg	1,1
A650004	M3	4	10	15	4	3	100kg	1,1
A650005	M3	5	10	20	5	4	100kg	2
A650006	M3	6	10	20	6	5	100kg	2
A650008	M4	8	12	23	8	7	150kg	2,6

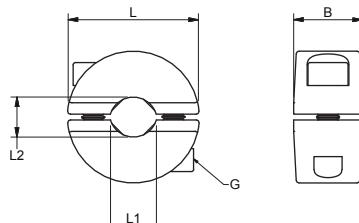

Inside jaws
for better grip




The stoppers can be used on both horizontal balustrades and e.g. as climbing help for vertical trellis wires.

STOPPER

Polished stainless steel - AISI 316

ART. NO.	G	WIRE	L	D	KG/100
A660003	M8	3 - 4	12	15	13
A660005	M10	5 - 6	15	20	30

Note: 7x19 and 7x7 wire construction only




These wire stops have to be pulled on the wire before endfittings are swaged. Afterwards the stoppers can be pressed in the right position on the wire.



WIRESTOP

Polished stainless steel - AISI 316

ART. NO.	WIRE	D1	D2	L1	KG/100	PACK
TAL9004	4	5/32"	4,4	7,5	8	0,2
TAL9005	5	-	5,3	9	10	0,3
TAL9006	6	1/4"	6,5	12,6	12	0,9
TAL9007	7	9/32"	7,5	12,6	12	0,8
TAL9008	8	5/16"	8,5	16	16	1,8

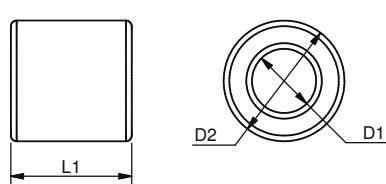





Glass roof system

Modern and exclusive designed anchor system for glass roofs - protects entrances against wind and weather.

- Flexible in design - use two or more anchors and customize to individual glass roof size
- Available for canopies with wall distance from 1.000 - 1.400 mm
- 100 % AISI 316 stainless steel
- Mounted with M10 inside thread wall anchors







GLASS ROOF FITTINGS

Polished stainless steel - AISI 316

Two anchors mounted in a distance of 1.300 mm will allow for a glass canopy up to 1.900 mm long.

Depending on desired glass width, choose system for:

- 1.000 mm wall distance
- 1.200 mm wall distance
- 1.400 mm wall distance

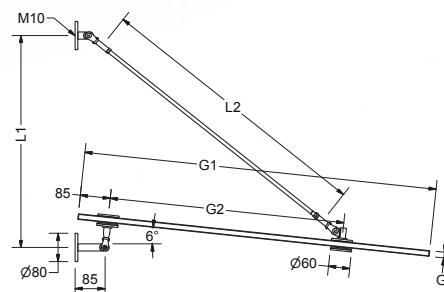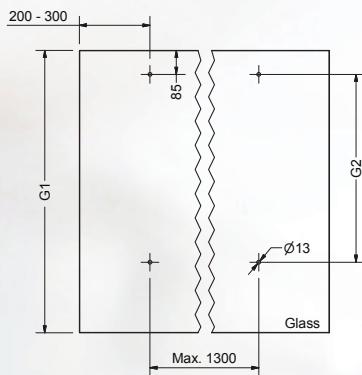

ART. NO.	G1	G2	G	L1	L2	MAX. LOAD PR ANCHOR	WEIGHT 1 LINE
AGLASS1S	1000	665	2x8 = 16	600	800	300 KG	2,061 KG
AGLASS2S	1200	865	2x8 = 16	750	1065	300 KG	2,228 KG
AGLASS3S	1400	1065	2x10 = 20	885	1295	300 KG	2,373 KG



Shade - and membrane plates



- AISI 316L stainless steel
- Flexible anchor plates for private and public use
- Suited for webbing and wire suspension
- Plate break loads up to 3.500 kg



CORNER PLATE FOR WEBBING

Polished stainless steel - AISI 316L

ART. NO.	BL/KG	KG/100	PACK
SAIL60	1200	21,1	1

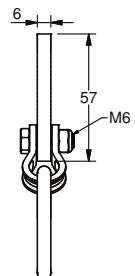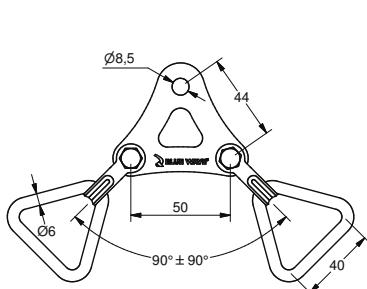

- Attach and tension with Ø 8 mm or 5/16" pin
- Break load 1200 kg




COPYRIGHT "MOON SOON"

CORNER PLATE FOR Ø 6 MM WIRE

Polished stainless steel - AISI 316L

ART. NO.	BL/KG	KG/100	PACK
SAIL130	3500	119	1

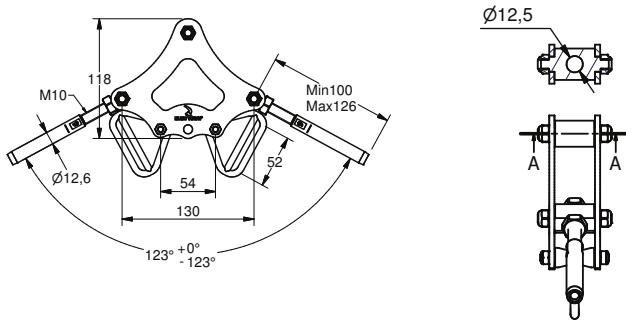

- Attach with M12 or $\frac{1}{2}$ " thread, washers and nuts
- On request also available:
 - For $\frac{1}{4}$ " wire size
 - With DIY wire terminals
 - With UNF threaded swage terminals.
- Break load 3500 kg




Ball connection for Ø 3, 4 & 5 mm wire railings

- Imperial wire sizes 1/8", 5/32" & 3/16"
- Elegant and flexible in angle up to 45 degrees
- Easy mounting and tensioning
- Single cable runs up to 9 meters
- Washer for round posts available
- Swageless termination available

BALL CONNECTION

Polished stainless steel - AISI 316L


ART. NO.	G	WIRE	D1	D2	D3	D4	L1	L2	L3	L4	L5	BL/KG	KG/100	PACK
A290603	M6	3	5,5	20	3	6,3	65	25	20	19	15	360	5,5	10
A290604	M6	4	6,35	20	3	6,3	65	25	20	19	15	500	6	10
A290605	M6	5	7,5	20	3	6,3	70	30	20	19	15	500	6,9	10

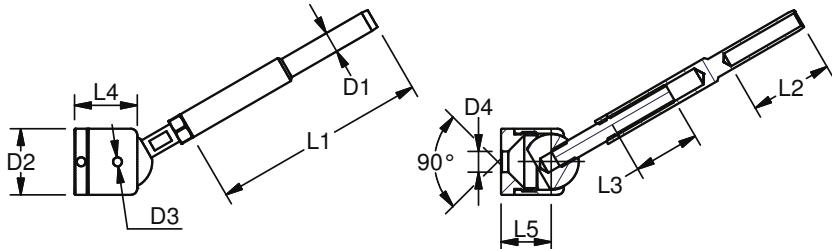

BALL CONNECTION TERMINAL

Polished stainless steel - AISI 316L


ART. NO.	WIRE	D1	D2	D3	D4	D5	L1	L2	L3	L4	BL/KG	KG/100	PACK
A290603T	3	5,5	3,5	6,3	20	3	51	25	26	19	360	3,9	10
A290604T	4	6,35	4,4	6,3	20	3	51	25	26	19	500	4	10
A290605T	5	7,5	5,3	6,3	20	3	58	30	28	19	500	4,5	10

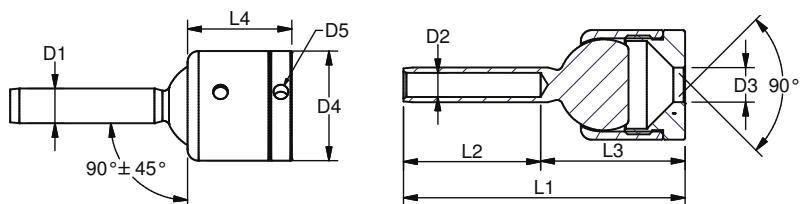

WASHER

Polished stainless steel - AISI 316L

ART. NO.	D1	D2	L	Ø
A03291506	20	6,3	6	42

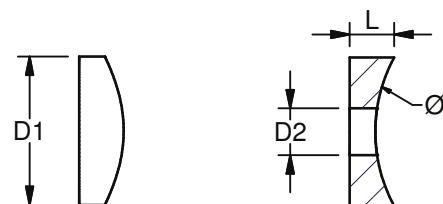




Green Line System

As advantages in green walls and trellis systems become known and demand for green urban environments grow, the Green Line system has become popular due to its long lifespan and low maintenance.

Green Line allows for easy and individually designed trellis systems on new as well as existing buildings and facades.

- Assists plants to climb without damaging the structure
- Elegant design and easy mounting
- Flexible design – posts take wire from Ø 4 – Ø 6 mm (5/32"-1/4")
- Posts available with 85 mm and 110 mm wall distance
- Mounts on M8 thread (eg. via inside thread anchor or dual thread screw)
- 100 % AISI 316 stainless steel

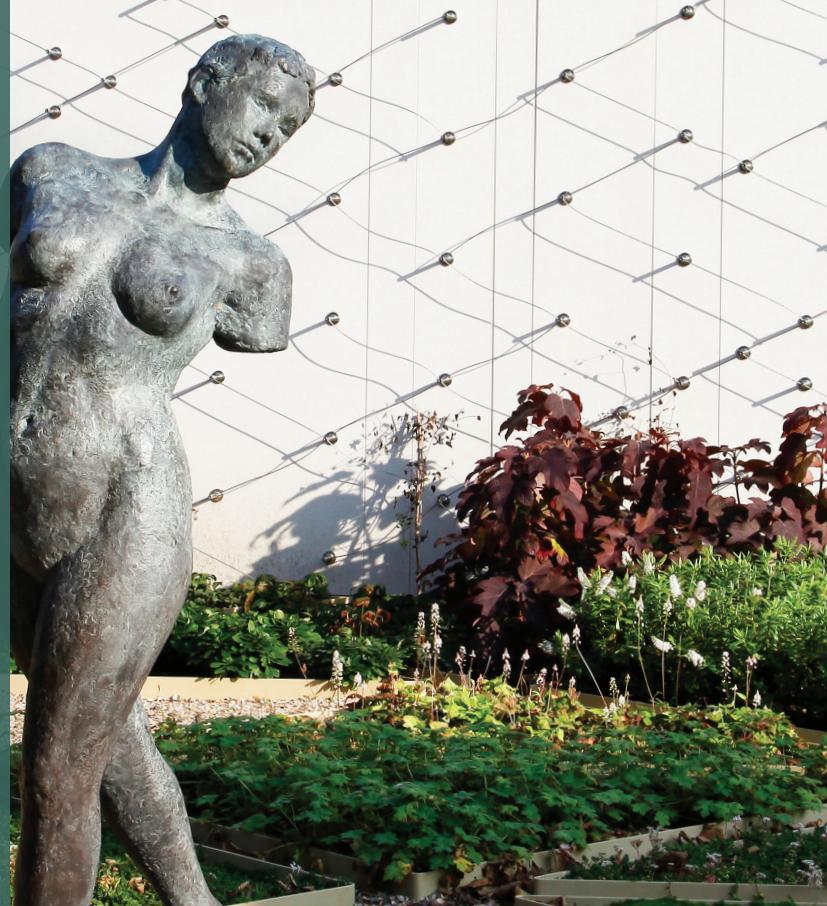

The green line posts individually take loads up to 100 kg and should be used with a maximum distance of one meter.

Add strength to the posts by additional attachment to a top eye.

As plants grow differently and local weather will impact loads applied to a fully grown Green Line wall this should always be taken into account when determining the amount of posts needed.



Suggested
terminals used
with posts





GREEN LINE POST

Polished stainless steel - AISI 316L

ART. NO.	D1	D2	D3	G1	G2	L1	L2	L3	L4	LOAD	KG/100	PACK
GL1	50	16	6,5	M8	M8	94	85	75	30	100kg	23,5	1
GL2	50	16	6,5	M8	M8	119	110	100	30	100kg	27,5	1



Mount on a M8 right hand threaded rod or use dual thread screw A410806

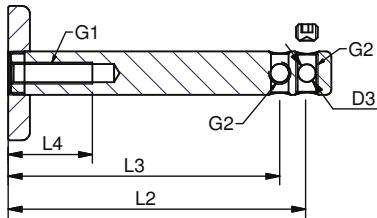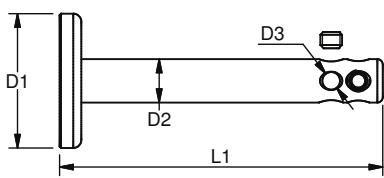

THREAD TOP EYE

Polished cast stainless steel - AISI 316

ART. NO.	B	D1	D2	D3	L1	L2	L3	BL/KG	KG/100	PACK
A421006	7	8,5	25	8	62	53	39	1200	2,5	10

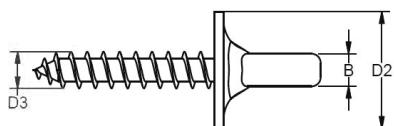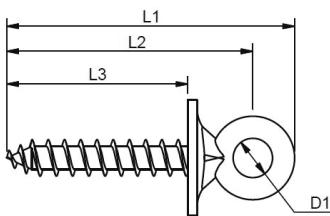

TIE BAR SYSTEM



As an alternative to wire systems, tie bars are especially useful for static structures such as balcony supports and glass facade structures. Standard components include adjuster forks and inside threaded connectors. The tie bars are available on request and can be delivered with or without key width in a polished or unpolished finish. Adjuster eyes also available on request.


WDS ADJUSTER FORKS

Polished stainless steel - AISI 316

ART. NO. RIGHT	ART. NO. LEFT	G	PIN	A	B	H	D	L1	L2	L3	L4	KW	BL/KG	KG/100
C700606	C710606	M6	6	6	12	5	14	43	20	35	26	10	1200	3,7
C700808	C710808	M8	8	7	15	7	18	54	25,5	43,5	32	13	2200	7,7
C701010	C711010	M10	10	8	18	8	22	66	31	53	39	16	3400	14,6
C701212	C711212	M12	12	10	22	10	26	78	37	63	46	19	5000	22,8
C701616	C711616	M16	16	12	27	12	34	100	46,5	80,5	59	23	9400	51,5
C702020	C712020	M20	20	15	33,5	14	42	122	57,5	98	72	29	14000	95,6
C702224	C712224	M24	22	25	45,5	16	55	150	75	120	75	36	21000	178,6

Note: All break loads are determined by clevis pin (fork) and thread

Threaded tie bars in various lengths are available on request

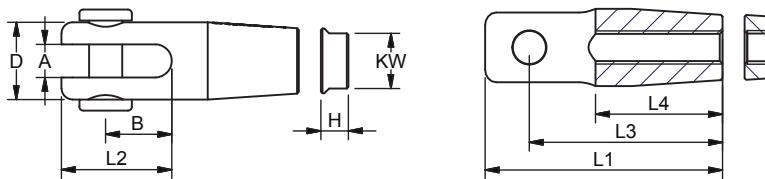

CONNECTOR

Polished stainless steel - AISI 316



ART. NO.	G	D1	L1	L2	BL/KG	KG/100	PACK
087006	M6	11	26	9	1200	1,2	BULK
087008	M8	12,5	33	12	2200	1,8	BULK
087010	M10	17	39	15	3400	4	BULK
087012	M12	22	52	18	5000	9,6	BULK
087016	M16	28	65	24	9400	19,3	BULK
087020	M20	33,5	78	30	14000	32,2	BULK
087024	M24	44	104	36	21000	79	BULK

Threaded tie bars in various lengths are available on request

TIE BAR AISI 316


Tie bars M6
- M24 up to
3.000 mm are
available on
request



ART. NO.	DIM MM
TIExxx	Ø 6-24



On request only:
Thread lengths to suit
adjuster forks

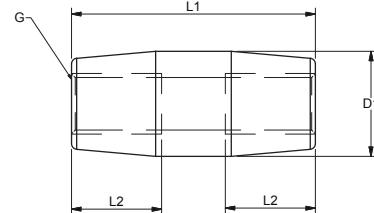



Vertical balustrade kit

Includes 110 mm 7x7 Ø 4 mm wire with one end pressed dropnose terminal for fast attachment and one DIY swageless thread terminal for bottom attachment and tensioning.

- 100 % AISI 316 stainless steel
- 300 kg break load
- DIY system flexible in use for private or field jobs
- Top and bottom Ø 6,5 mm hole size for easy mounting
- Loose fittings available



VERTICAL BALUSTRADE KIT

Stainless steel - AISI 316

Stainless steel wire with dropnose terminal and threaded DIY terminal for vertical tensioned balustrades and railing systems.

ART. NO	WIRE	G	BL/KG	KG/100
VBK0406	4 5/32"	M6	300	17,6



ROPE LINE

Benefiting from the knowledge on wire rope fittings Blue Wave has designed a range of rope fittings to be used with Dyneema ropes. See more rope fittings on our web page or refer to the Rope Line or marine catalogue.




DYNEEMA ROPE EYE

Polished stainless steel - AISI 316

ART. NO.	Dyneema	A	D1	D2	D3	KW	L1	L2	BL/KG	KG/100
RP820804	Ø4	5	16	8,5	6	11	45	12	1900	3,8
RP821005	Ø5	6	21	10,5	8	16	58,5	14,5	3200	8,5
RP821206	Ø6	9	25	13	10	19	71	17,5	5500	15,5
RP821408	Ø8	10	39	14,5	16	29	103,5	29,5	9400	47,2
RP821610	Ø10	13	45	16,2	18	33	120	34	15000	75,5
RP821912	Ø12	15	54	19,5	21	40	136,5	38	18000	117,1
RP822214	Ø14	18	65	23	26	47	163	42	26000	207,5
RP822516	Ø16	20	77	26	30	55	192	58	32000	302,2

Used for Ø 4 mm to Ø 16 mm Dyneema rope and combined with other Blue Wave fittings.

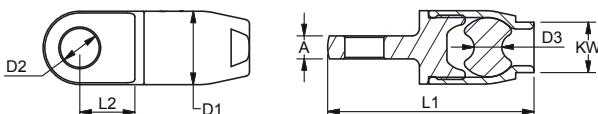

Community Design Registration 14/6 2017
design reg. -004048098-0004

STAINLESS STEEL WIRE ROPE

We deliver stainless steel - AISI 316 wire rope in the following standard reel sizes:

Example:


125 meter: Art. no. +/- WR119021

250 meter: Art. no. +/- WR119022

500 meter: Art. no. +/- WR119023

1x19 AISI 316 - DIN 3053

ART. NO.	DIM. MM	TENSILE STRENGTH KG	CA. KG/100
WR11902	2	336	1,99
WR11925	2,5	525	3,1
WR11903	3	756	4,47
WR11904	4	1346	7,95
WR11905	5	2100	12,4
WR11906	6	3027	17,9
WR11907	7	4119	24,3
WR11908	8	5302	31,8
WR11910	10	8035	49,7




stiff wire construction



7x7 AISI 316 - DIN 3055

ART. NO.	DIM. MM	TENSILE STRENGTH KG	CA. KG/100
WR70702	2	229	1,71
WR70725	2,5	369	2,6
WR70703	3	517	3,85
WR70704	4	918	7
WR70705	5	1435	10,5
WR70706	6	2068	14,8
WR70708	8	3676	25,5
WR70710	10	5741	38,8
WR70712	12	8269	55,5




flexible wire construction



7x19 AISI 316 - DIN 3060

ART. NO.	DIM. MM	TENSILE STRENGTH KG	CA. KG/100
WR71902	2	212	1,58
WR71925	2,5	332	2,4
WR71903	3	478	3,84
WR71904	4	850	6,49
WR71905	5	1325	9,14
WR71906	6	1913	13,8
WR71908	8	3395	23,87
WR71910	10	5312	40,3



very flexible wire construction



1x19 AISI 316 - COATED WHITE

ART. NO.	DIM. MM	TENSILE STRENGTH KG	CA. KG/100
CW119460	4 - 6	1346	9,5



stiff wire construction

7x7 AISI 316 - COATED WHITE

ART. NO.	DIM. MM	TENSILE STRENGTH KG	CA. KG/100
CW707460	4 - 6	918	8,75



flexible wire construction


TOOLS

WDS CRIMPING TOOL

WDS accu tool for 3 - 6 mm small WDS terminals

ART. NO.	WIRE SIZE METRIC	CRIMPING DIAMETER	KG/1
ARCTOOL1ACC	3 - 6 mm	5,5 - 9 mm	3,2

Note: Dies included - loose dies are available on request

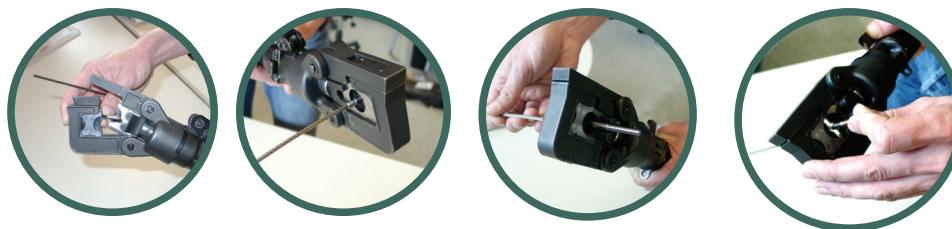

One-hand-operated Arctool, delivered in toolbox with a 18V 2200 mAh battery. Charges up to 1000 times. Each charge delivers power to press up to app. 100 times. For use and access in narrow places the head is turnable 180o. The pressing force is 55 kN and a "click" will be heard when pressing done. The tool is CE-certified.

DUAL THREAD SCREW TONG

WDS tool for dual screw

ART. NO.	THREAD SIZE METRIC	KG/1
ARCTOOL3	M5 - M10	0,5

Right handed thread only



CRIMPING TOOL

Economy tool for 3 - 8 mm small WDS terminals

ART. NO.	WIRE SIZE METRIC	CRIMPING DIAMETER	KG/1
ARCTOOL8	3 - 8 mm	5,5 - 12,6 mm	5,2

Note: Dies included - lose dies available on request



WDS tool for handcrimping small WDS terminals Ø 3 mm - Ø 8 mm. Hydraulic and including dies.



Mechanical WDS tong for crimping 3 and 4 mm small fittings on flexible wire 7x7 and 7x19 construction.

WDS CRIMPING TOOL

WDS tong for 3 - 4 mm WDS small fittings

ART. NO.	WIRE SIZE METRIC	CRIMPING DIAMETER	KG/1
ARCTOOL4	3 - 4 mm	5,5 - 6,35 mm	1,7

Use on flexible wire only (e.g. 7x19 & 7x7)

WIRE CUTTER

WDS wire cutters up to 12 mm

ART. NO.	WIRE SIZE	KG/1
ARCTOOL5	Max dia 4 - 5/32"	0,7
ARCTOOL6	Max dia 7 - 9/32"	1,5
ARCTOOL7	Max dia 12 - 1/2"	2,8



www.bluewave.dk

Blue Wave reserves the right to change specifications and descriptions contained in the WDS catalogue with no notification. Printing errors may occur. 2023 - 2. edition.